
### Overview

### HP EliteBook 820 G1 Notebook PC

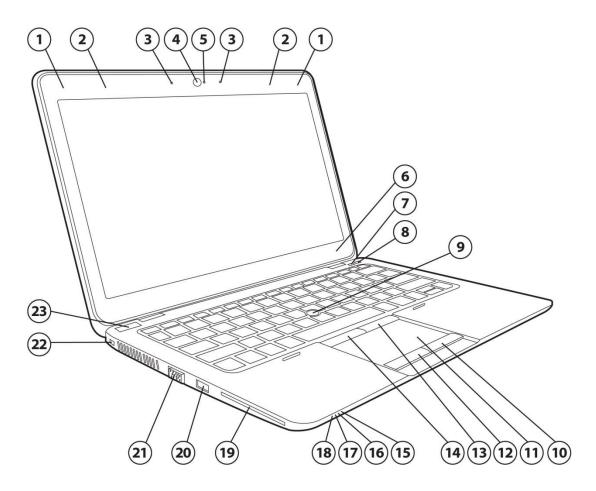


Front/Left

- 1. WLAN antennas (2)
- 2. WWAN antennas (2)
- 3. Internal microphones (2)
- 4. Webcam (select models only)
- 5. Webcam light (select models only)
- 6. Internal display switch
- 7. Wireless button
- 8. Volume mute button
- 9. Pointstick
- 10. Right TouchPad button
- 11. TouchPad zone
- 12. Left TouchPad button

- 13. Right pointing stick button
- 14. Left pointing stick button
- 15. Hard drive light
- 16. AC adapter/Battery light
- 17. Power light
- 18. Wireless light
- 19. Smart card reader
- 20. USB 3.0 charging port
- 21. External VGA monitor port
- 22. Security cable slot
- 23. Power button



## Overview

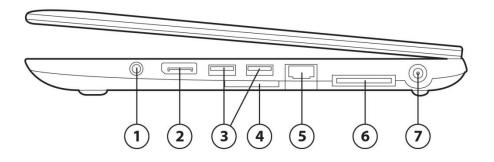

#### Right


- 1. Audio-out (headphone) jack/Audio-in(microphone) jack
- 2. DisplayPort
- 3. USB 3.0 ports (2)
- 4. Memory card reader

- 5. Drop-jaw Ethernet port (RJ-45)
- 6. Docking port
- 7. Power connector



### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

## Overview

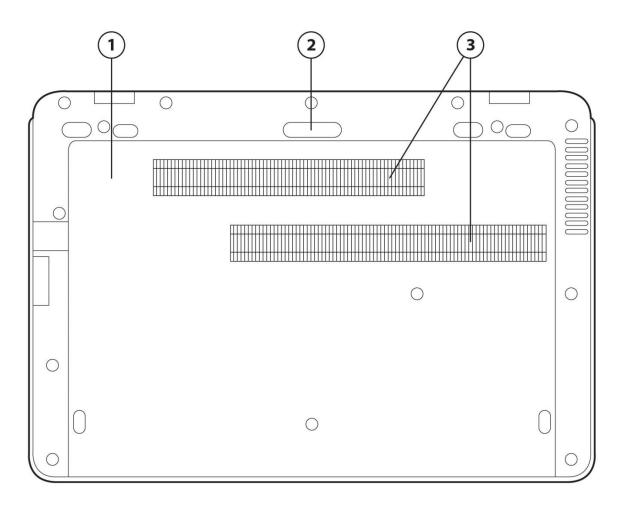

#### Bottom


EasyAccess panel
 EasyAccess panel release lock

3. Vents (2)



## Overview

### HP EliteBook 840 G1 Notebook PC

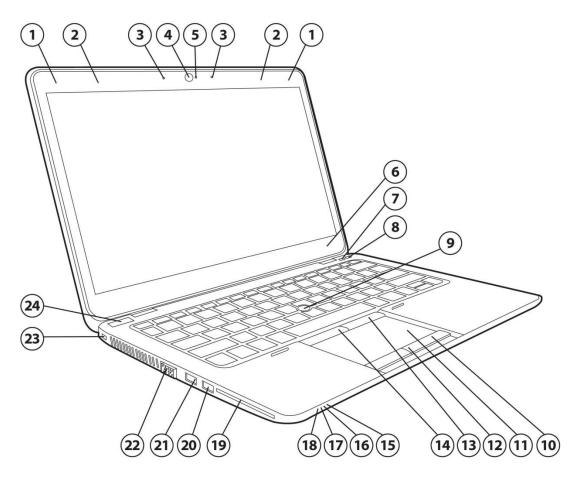


#### Front/Left

- 1. WLAN antennas (2)
- 2. WWAN antennas (2)
- 3. Internal microphones (2)
- 4. Webcam (select models only)
- 5. Webcam light (select models only)
- 6. Internal display switch
- 7. Wireless button
- 8. Volume mute button
- 9. Pointstick
- 10. Right TouchPad button
- 11. TouchPad zone
- 12. Left TouchPad button

- 13. Right pointing stick button
- 14. Left pointing stick button
- 15. Hard drive light
- 16. AC adapter/Battery light
- 17. Power light
- 18. Wireless light
- 19. Smart card reader
- 20. USB 3.0 port
- 21. USB 3.0 charging port
- 22. External VGA monitor port
- 23. Security cable slot
- 24. Power button



## Overview

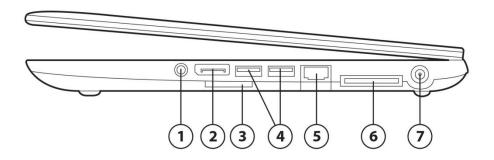


#### Right

- 1. Audio-out (headphone) jack/Audio-in(microphone) jack
- 2. DisplayPort
- 3. Memory card reader
- 4. USB 3.0 ports (2)

- 5. Drop-jaw Ethernet port (RJ-45)
- 6. Docking port
- 7. Power connector



## Overview

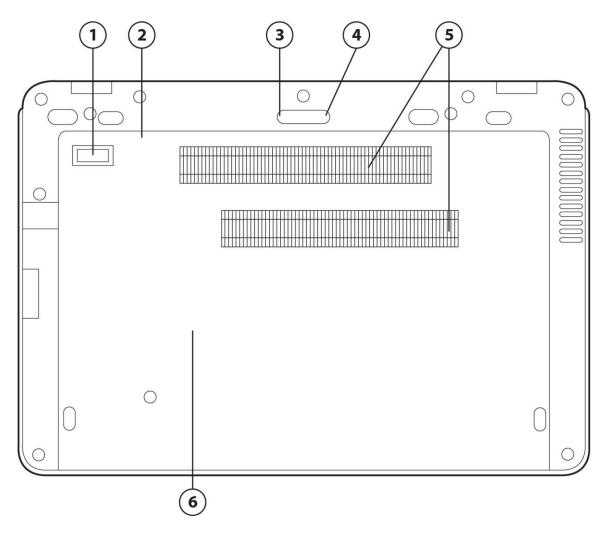

- 1. Accessory battery connector
- 2. EasyAccess panel
- 3. EasyAccess panel release latch


\* Supports full-size 2FF (mini-SIM card)

- 4. Service door release lock
- 5. Vents (2)
- 6. SIM slot \*



## Overview

### HP EliteBook 850 G1 Notebook PC

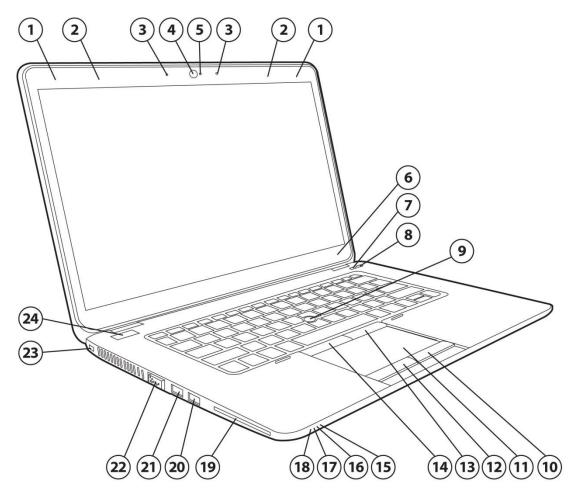


Front/Left

- 1. WLAN antennas (2)
- 2. WWAN antennas (2)
- 3. Internal microphones (2)
- 4. Webcam (select models only)
- 5. Webcam light (select models only)
- 6. Internal display switch
- 7. Wireless button
- 8. Volume mute button
- 9. Pointstick
- 10. Right TouchPad button
- 11. TouchPad zone
- 12. Left TouchPad button

- 13. Right pointing stick button
- 14. Left pointing stick button
- 15. Hard drive light
- 16. AC adapter/Battery light
- 17. Power light
- 18. Wireless light
- 19. Smart card reader
- 20. USB 3.0 port
- 21. USB 3.0 charging port
- 22. External VGA monitor port
- 23. Security cable slot
- 24. Power button



## Overview

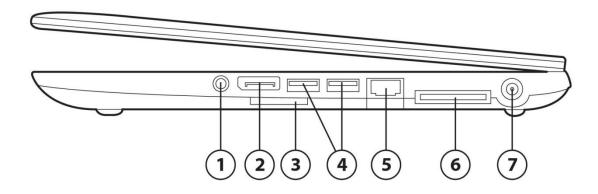


#### Right

- 1. Audio-out (headphone) jack/Audio-in(microphone) jack
- 2. DisplayPort
- 3. Memory card reader
- 4. USB 3.0 ports (2)

- 5. Drop-jaw Ethernet port (RJ-45)
- 6. Docking port
- 7. Power connector



## Overview

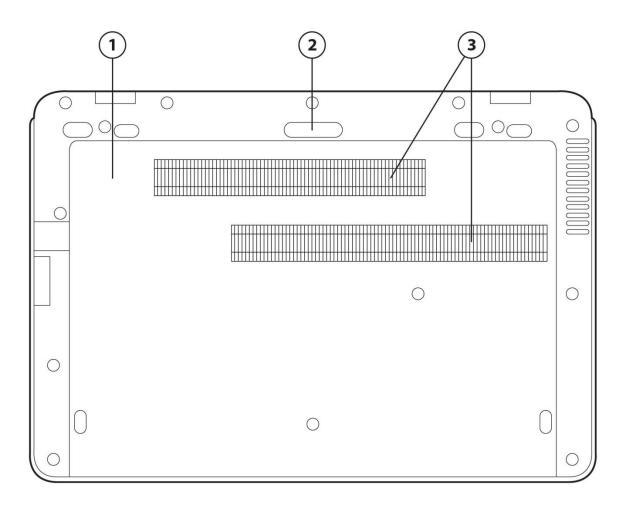

EasyAccess panel
 EasyAccess panel release lock

Bottom 3. Vents (2)



## Overview

## AT A GLANCE

- Windows 8.1 Pro 64, Windows 8.1, Windows 8 versions, Windows 7 versions, SUSE Linux, or FreeDOS
- Lync certified
- Magnesium and aluminum chassis, HP DuraFinish, HP DisplaySafe frame, HP duraKeys, precision aluminum drop hinge, aluminum palm rest
- 4-step Soft-touch paint process
- Patent-pending Drop-jaw Ethernet port
- EasyAccess door to quickly access most components for easy serviceability
- Full-sized spill-resistant keyboard; optional back-lit keyboard keeps you productive in low-light settings
- Ensured durability through MIL-SPEC 810G testing, plus an additional 115,000 hours of reliability testing through HP's Total Test Process
- Choice of 4<sup>th</sup> generation Intel<sup>®</sup> Core<sup>™</sup> i7, i5 and i3 processors
- Integrated Intel<sup>®</sup> HD Graphics 4400 or AMD Radeon<sup>™</sup> HD 8750M discrete graphics with 1 GB dedicated GDDR5 video memory
- LED-backlit display
  - HP EliteBook 820: 12.5-inch diagonal HD, HD Premium or HD Premium Touch
  - HP EliteBook 840: 14.0-inch diagonal HD, HD+ (including a touch-enabled option), or FHD
  - HP EliteBook 850: 15.6-inch diagonal HD or FHD
- Easily hot dock with the 2013 UltraSlim Docking Station
- DisplayPort for high resolution support
- Touchpad with scroll zone, on/off button with LED indicator
- Enhanced security features including HP Sure Start self-healing BIOS, HP Client Security, HP Trust Circles Standard and optional HP Fingerprint Reader
- Optional HD webcam with dual-microphone array for video conferencing
- HD Audio with DTS Studio Sound optimized for high fidelity audio
- Wireless and speaker mute buttons
- Flexible wireless connectivity options:
  - HP Connection Manager allows full control over wireless connections, including 3G and 4G mobile broadband, Wi-Fi, Ethernet and Bluetooth<sup>®</sup> (Win 7 only)
  - Integrated 4G HP Mobile Broadband Modules
  - HP Wireless Hotspot (Win 8 Only)
  - HP Mobile Connect (EMEA Only) (Win 8 Only)
  - Intel WiDi Software
- Choice of 7200 rpm user-removable hard drive (up to 500 GB) with HP 3D DriveGuard, 5400 rpm user-removable hard drive (up to 1 TB on EliteBook 840 and 850), 500 GB 7200 rpm Self Encrypting Drive, 500 GB 5400 rpm FIPS Self Encrypting Drive, 180/256 GB SED Solid State Drive, or 128/180/240/512 GB Solid State Drive
- 120 GB M.2 (NGFF) SSD
- M.2 32GB flash cache for Intel Smart Response Technology

#### NOTE: See important legal disclosures for all listed specs in their respective features sections.



Options and Accessories (sold separately and availability may vary by country)

### **PRODUCT NAMES**

HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

### **OPERATING SYSTEM**

#### Preinstalled

Windows 8.1 Pro 64\* Windows 8.1 64\* Windows 8 Pro 64\* Windows 7 Professional (available through downgrade rights from Windows 8 Pro)\*\* Windows 8 64\* Windows 7 Professional 32\*\*\* Windows 7 Professional 64\*\*\* Windows 7 Home Premium 32\*\*\* Windows 7 Home Premium 64\*\*\* Windows 7 Home Basic 32\*\*\* SUSE Linux FreeDOS

\* Not all features are available in all editions of Windows 8/Windows 8.1. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8/Windows 8.1 functionality. See <u>http://www.microsoft.com</u> for details.

\*\* This system is preinstalled with Windows<sup>®</sup> 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

\*\*\* Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <a href="http://www.microsoft.com/windows/windows-7/">http://www.microsoft.com/windows/windows-7/</a> for details.

### PROCESSOR

4<sup>th</sup> Generation Intel<sup>®</sup> Core™ i7-4600U with Intel HD Graphics 4400 (2.1 GHz, 4 MB cache, 2 cores)\* Up to 3.3 GHz with Intel Turbo Boost Technology

4<sup>th</sup> Generation Intel<sup>®</sup> Core™ i7-4500U with Intel HD Graphics 4400 (1.8 GHz, 4 MB cache, 2 cores)\*.\*\* Up to 3.0 GHz with Intel Turbo Boost Technology

4<sup>th</sup> Generation Intel<sup>®</sup> Core<sup>™</sup> i5-4300U with Intel HD Graphics 4400 (1.9 GHz, 3 MB cache, 2 cores)\* Up to 2.9 GHz with Intel Turbo Boost Technology

4<sup>th</sup> Generation Intel<sup>®</sup> Core<sup>™</sup> i5-4200U with Intel HD Graphics 4400 (1.6 GHz, 3 MB cache, 2 cores)\*.\*\* Up to 2.6 GHz with Intel Turbo Boost Technology

4th Generation Intel® Core™ i3-4010U with Intel HD Graphics 4400 (1.7 GHz, 3 MB cache, 2 cores)\*,\*\*

\* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel<sup>®</sup> architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel<sup>®</sup> 64 architecture. Processors will not operate (including 32-bit operation) without an Intel<sup>®</sup> 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.



## Options and Accessories (sold separately and availability may vary by country)

\*\* Not available with Intel iAMT (\*Not available with vPro)

**NOTE**: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

### INTEL TURBO BOOST TECHNOLOGY\*

Intel Turbo Boost is a feature that speeds up the CPU for a short time. It is similar to overclocking the processor, except within a framework provided by Intel. This feature provides additional performance and allows the computer to perform certain tasks more quickly. It also draws additional power and generates additional heat. Therefore, if Turbo Boost is used while powered from battery, it causes additional stress on the battery.

Using Turbo Boost while powered from battery might impact battery cycle life. Cycle life describes how long the battery will last before it needs to be replaced. A cycle refers to one complete charge/discharge cycle of the battery. Because Turbo Boost causes extra stress on the battery, it often shortens the lifetime of the battery.

HP decided not to enable Turbo Boost when powered from battery. This decision was based on the desire to give customers the greatest battery cycle life possible. Turbo Boost is enabled when powered from AC adapter.

Based on customer requests, HP will provide an option to enable Turbo Boost while powered from battery. For the 2013 platform, it will be an F10 option. Turbo Boost will be available for devices powered from battery by the end of the year. The additional performance might cause a slight reduction in battery cycle life, but will not void the battery warranty.

\*Implementing Turbo Boost in F10 option is only allowed for batteries over 40WHr. Intel<sup>®</sup> Turbo Boost technology requires a PC with a processor with Intel Turbo Boost capability. Intel Turbo Boost performance varies depending on hardware, software and overall system configuration. See <u>www.intel.com/technology/turboboost</u> for more information.

### CHIPSET

Chipset integrated with processor

### INTEL CORE 15 WITH VPRO/CORE 17 WITH VPRO TECHNOLOGY CAPABLE

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with select processors, an Intel Centrino<sup>®</sup> Advanced-N or Ultimate-N WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology 9.0 (iAMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off\* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

\*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

**NOTE**: Some functionality of this technology, such as Intel<sup>®</sup> Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on 3rd party software providers. Microsoft Windows required. For hard drives, GB = 1 billion



## Options and Accessories (sold separately and availability may vary by country)

bytes. Actual formatted capacity is less. Up to 30 GB for Windows 8 is reserved for system recovery software.

### GRAPHICS

Integrated: Intel® HD Graphics 4400 Discrete\*: AMD Radeon™ HD 8750M\*\*, with 1 GB dedicated DDR5 video memory\*\*\*

\* HP EliteBook 840 and 850 only.

\*\* HD content required to view HD images.

\*\*\* AMD Dynamic Switchable Graphics technology requires an Intel processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS and Linux OS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be).

### DISPLAY

#### HP EliteBook 820

#### Internal

12.5" diagonal LED-backlit HD anti-glare SVA flat (1366 x 768)

12.5" diagonal LED-backlit HD Premium anti-glare UWVA slim (1366 x 768)

12.5" diagonal HD Premium UWVA ultra slim (1366x768) Capacitive Touch\* with camera

#### External

Up to 32-bit per pixel color depth

#### VGA

Port supports resolutions up to 1920 x 1200 external resolution@60 Hz

#### DisplayPort

Supports resolutions up to 3200x2000 @ 60Hz

Number of Displays with 2013 UltraSlim Docking Station	UMA	Discrete
EliteBook 820	3	n/a

\* Touch panel has chemically-strengthened Gorilla glass top cover

#### HP EliteBook 840

#### Internal

- 14" diagonal LED-backlit HD anti-glare SVA flat (1366 x 768)
- 14" diagonal LED-backlit HD+ anti-glare SVA flat (1600 x 900)
- 14" diagonal LED-backlit HD+ SVA flat + touch (1600 x 900)\*



## Options and Accessories (sold separately and availability may vary by country)

14" diagonal LED-backlit FHD anti-glare UWVA slim (1920 x 1080) **External** Up to 32-bit per pixel color depth **VGA** Port supports resolutions up to 1920 x 1200 external resolution @60 Hz **DisplayPort** Supports resolutions up to 3200x2000 @ 60Hz

\* Touch panel has chemically-strengthened Gorilla glass top cover

Number of Displays with 2013 UltraSlim Docking Station*	UMA	Discrete
EliteBook 840	3	3

**NOTE**: HD content required to view HD images.

**NOTE**: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

#### HP EliteBook 850

#### Internal

15.6" diagonal LED-backlit HD anti-glare SVA flat (1366 x 768) 15.6" diagonal LED-backlit FHD anti-glare SVA slim(1920 x 1080) **External** Up to 32-bit per pixel color depth **VGA** Port supports resolutions up to 1920 x 1200 external resolution @60 Hz **DisplayPort** 

Supports resolutions up to 3200x2000 @ 60Hz

Number of Displays with 2013 UltraSlim Docking Station*	UMA	Discrete
EliteBook 850	3	3

**NOTE:** HD content required to view HD images.

**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

### **STORAGE AND DRIVES**

Primary Storage Bay Hard Drives\* 320/500 GB/1 TB\*\* 5400 rpm SATA II Hard Drive 320/500 GB 7200 rpm SATA II Hard Drive



## Options and Accessories (sold separately and availability may vary by country)

500 GB 7200 rpm SED (Self Encrypting Drive) 500 GB 5400 rpm FIPS\*\*\* SED (Self Encrypting Drive)

#### Solid State Drive\*

120 GB M.2 (NGFF) Solid State Drive 128/180/240/512 GB 2.5" Solid State Drive 180/256 GB SED Solid State Drive

**NOTE**: If 120 GB M.2 (NGFF) SSD is selected, any of the HDD and SSD can be configured as secondary storage.

#### HP 3D DriveGuard (Windows only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive

\*For hard drives and solid state drives, GB = 1 billion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software. \*\* 1TB only available on EliteBook 840 and 850.

\*\*\* FIPS-certified, hardware-based AES-256 encryption image

**NOTE:** For Solid State Drives (SSD), GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 5GB for Windows 8 is reserved for system recovery software.

### **FLASH CACHE**

32 GB M.2 (NGFF)

Optional 32 GB M.2 flash cache module support for Intel Smart Response Technology. (Available only with standard non-SED hard drive.)

### MEMORY

Standard DDR3L SDRAM (1600 MHz) Two SODIMM slots supporting dual-channel memory 4 GB and 8 GB\* SODIMMs Maximum Upgradeable to 16384 MB with optional 8192 MB SODIMMs in slots 1 and 2\* Dual-channel Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

\* Maximum memory capacities assume Windows 64-bit operating systems or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

### **NETWORKING/COMMUNICATIONS**

#### Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a



## Options and Accessories (sold separately and availability may vary by country)

standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

#### Broadband Wireless (WWAN)

HP hs3110 HSPA+ Mobile Broadband Module\* HP lt4111 LTE/EV-DO/HSPA+ Gobi Mobile Broadband Module (US)\*,\*\* HP lt4112 LTE/HSPA+ Mobile Broadband Module (EMEA, APJ) **Wireless LAN (WLAN)\*\*\*** 

Broadcom 802.11 (2x2) a/b/g/n + Bluetooth 4.0\*\*\*

Intel Dual Band Wireless-AC 7260 802.11 ac (2x2) + BT 4.0 combo\*\*\*

Intel Dual Band Wireless-N 7260AN 802.11 a/b/g/n (2x2) + BT 4.0 combo\*\*\*

Intel Dual Band Wireless-N 7260NB 802.11 a/b/g/n (2x2) \*\*\*

\* WWAN is an optional feature sold separately or as an add on feature. WWAN connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

\*\* 4G LTE not available on all products, in all regions and only available on products featuring Intel processors.

\*\*\*Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.

#### Communications

Intel® I218LM Gigabit\* Network Connection (10/100/1000 NIC)

\* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

### AUDIO/MULTIMEDIA

#### Audio

HD Audio with DTS Studio Sound 2 Integrated stereo speakers Integrated dual-microphone array; located in the display Function keys for microphone mute, volume up, volume down Stereo headphone/line out Stereo microphone/line in

#### Webcam

Optional 720p HD\* webcam

- HD format (widescreen)
- Supports videoconferencing (non-HD) and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range
- Skype-ready \*\*



## Options and Accessories (sold separately and availability may vary by country)

\* HD content required to view HD images.

\*\*Internet access required.

## **KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS**

#### Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and includes an all-metal keyboard deck for greater rigidity, as well as HP DuraKeys. HP DuraKeys are 50 times more resistant to visible wear than keyboards without them.\* The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, and function keys. US and International key layouts are available. Backlit keyboard available as an option.

#### **Pointing Devices**

Touchpad with scroll zone, on/off button with LED indicator, two-way scroll, two pick buttons

#### **Buttons and Function Keys**

Separate discrete buttons provide easy access to WLAN on/off and speaker mute. Function keys provide control of features including: standby mode, display brightness, external display, microphone mute, volume down, and volume up. \* In independent testing conducted by Trace Laboratories, HP DuraKeys showed no wear after 250,000 cycles. Competitor

notebooks showed significant wear after only 5,000 cycles.)

### SOFTWARE AND SECURITY

#### Preinstalled Software with Windows Operating System

#### BIOS

HP BIOSphere\* HP Sure Start\*\* HP DriveLock | HP Automatic Drive Lock HP BIOS Protection\*\*\* HP Disk Sanitizer \*\*\*\* HP SpareKey\*\*\*\*\* Update via Network Master Record Security Power On Authentication Pre-Boot Security Secure Erase\*\*\*\*\* Hybrid Boot Measured Boot Secure Boot Absolute Persistence Module\*\*\*\*\*\*

\* Available only on business PCs with HP BIOS.

\*\* HP SureStart is the first and only self-healing technology solution created to protect against Malware and Security attacks aimed at the BIOS. Available only EliteBooks and ZBooks.

\*\*\* May require a manual recovery step for recovery if all copies of BIOS are compromised or deleted. Feature not supported on ElitePads. HP Business Desktops introduced prior to 2013 do not support this HP BIOS Protection auto-recovery feature. \*\*\*\* For the use cases outlined in the DOD 5220.22-M Supplement. Only supports traditional Hard Drives. \*\*\*\*\* Requires initial user set up.

\*\*\*\*\*\* For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.



## Options and Accessories (sold separately and availability may vary by country)

\*\*\*\*\*\* Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: http://www.absolute.com/company/legal/agreements/computrace-agreement. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

#### MultiMedia

CyberLink PowerDVD

#### Communication

HP Connection Manager (Windows 7 only) HP GPS and Location\* HP Mobile Connect (Windows 8 only)\*\* HP Wireless Hotspot\*\*\* (Windows 8 only) Intel WiDi Software\*\*\*\* HP Roaming Alert Intel My WiFi and Wireless Drivers

#### **HP Value Add Software**

Getting Started with Windows 8 HP 3D DriveGuard (Windows required) HP ePrint Driver (HP Exclusive)\*\*\*\*\* HP Hotkey Support HP PageLift (HP Exclusive with Windows 8) HP Recovery Manager (Windows 8 only) HP Support Assistant W8 HP Recovery Disc Creator (Windows 7 only) UEFI System Diagnostics W8

#### 3<sup>rd</sup> Party

Adobe® Flash Player (Commercial) Bing Search Skype\*\*\*\*\* Buy Office Lync Certified\*\*\*\*\*\*

**NOTE:** HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software.

\*GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.

\*\*Internet access required.

\*\*\* The wireless hotspot application requires an active internet connection and separately purchased data plan. While HP wireless hotspot is active, on-device applications will continue to work and will use the same data plan as the wireless



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

## Options and Accessories (sold separately and availability may vary by country)

hotspot. Wireless hotspot data usage may incur additional charges. Check with your service provider for plan details. Requires Windows.

\*\*\*\* Integrated Intel Wi-Di feature is available on select configurations only and requires separately purchased projector, tv or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, tv or computer monitor via a standard HDMI cable, also sold separately.

\*\*\*\*\*Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter).Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

afterwards for full functionality."

\*\*\*\*\*\* Skype is not offered in China.

\*\*\*\*\*\* Lync software is sold separately. Requires internet access.

#### **Standard Security Features**

HP Client Security with Credential Manager and Password Manager (Windows only) HP Device Access Manager with Just in Time Authentication HP Drive Encryption (FIPS 140-2 certified)\* HP File Sanitizer\*\* Microsoft Security Essentials (Windows 7 only)\*\*\* HP Trust Circles Standard\*\*\*\* Central Management of Client Security Credential Manager with DigitalPersona Pro Workgroup\*\*\*\*\* Computrace Support TPM Embedded Security Chip 1.2 (EAL4+ Certified)

#### **Optional Security Features**

Intel<sup>®</sup> Anti-Theft\*\*\*\*\* Intel Identity Protection\*\*\*\*\*\* HP Fingerprint reader

**NOTE:** The Absolute Persistence agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

\* Requires Windows. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

\*\* For the use cases outlined in the DOD 5220.22-M Supplement. Supports standard Hard Drives. Initial setup required.

\*\*\* Opt in and internet connection required for updates.

\*\*\*\* HP Trust Circles Standard, when included, allows up to 5 Trust Circles with up to 5 contacts in each Trust Circle. Optional Trust Circles Pro required for unrestricted number of Trust Circles and contacts. Trust Circles Reader is available to allow a contact to participate in an invited Trust Circle. Requires Windows. Available at <a href="http://hptc.cryptomill.com">http://hptc.cryptomill.com</a>.

\*\*\*\*\* In order to deploy and receive updated policies, the client needs to be connected to the network server and requires separately purchased DigitalPersona Pro software. System access may not prevent users from logging into the system on the first attempt if policy updates haven't yet been received and applied. Not all features are remotely manageable.

\*\*\*\*\*\*\* Intel Anti-Theft security is supported on Intel Core i processors and requires a separately purchased Absolute Computrace service subscription and must be activated and configured. Check with Absolute for availability in your country. Intel and HP assume no liability for lost or stolen data and/or systems or any other damages resulting therefrom. See



## Options and Accessories (sold separately and availability may vary by country)

#### http://www.intel.com/technology/anti-theft/.

\*\*\*\*\*\*\*\*\* Intel Identity Protection feature is only available with Intel Core Processors. Intel<sup>®</sup> IPT security requires separate Symantec VIP software service subscription and must be activated and configured. Requires a website that uses Symantec VIP Authentication Service and Microsoft<sup>®</sup> Windows. Intel<sup>®</sup> and HP assume no liability for lost or stolen data and/or systems or any other damages resulting therefrom.

For more information on HP security solutions refer to: <u>http://www.hp.com/go/protecttools</u>.

### POWER

#### **Power Supply**

#### HP EliteBook 820 G1 Notebook PC

HP 45W Smart AC Adapter 45W 2-prong 7.4mm DC jack AC Adapter (Only for Japan) HP 65W Smart EM AC Adapter (China and India only) HP 65W Slim Smart AC Adapter (Japan and Australia only) Power cord is configurable; either 3.2 feet or 6 feet (1.0 or 1.8 meter) Total length including external AC adapter is 9.2 feet or 12 feet (2.86 or 3.66 meter).

#### HP EliteBook 840 G1 Notebook PC

Integrated graphics: HP 45W Smart AC adapter 45W 2-prong 7.4mm DC jack AC Adapter (Only for Japan) HP 65W Smart AC adapter HP 65W EM Smart AC adapter (China and India only) HP 65W Slim Smart AC adapter (Japan and Australia only) Discrete graphics: HP 65W Smart AC adapter HP 65W EM Smart AC adapter HP 65W EM Smart AC adapter (China and India only) HP 65W Slim Smart AC adapter (Japan and Australia only) Power cord is configurable; either 3.2 feet or 6 feet (1.0 or 1.8 meter) Total length including external AC adapter is 9.2 feet or 12 feet (2.86 or 3.66 meter).

#### HP EliteBook 850 G1 Notebook PC

Integrated graphics: HP 45W Smart AC adapter 45W 2-prong 7.4mm DC jack AC Adapter (Only for Japan) HP 65W Smart AC adapter HP 65W EM Smart AC adapter (China and India only) HP 65W Slim Smart AC adapter (Japan and Australia only) Discrete graphics: HP 65W Smart AC adapter HP 65W EM Smart AC adapter HP 65W EM Smart AC adapter (China and India only) HP 65W Slim Smart AC adapter (Japan and Australia only) Power cord is configurable; either 3.2 feet or 6 feet (1.0 or 1.8 meter) Total length including external AC adapter is 9.2 feet or 12 feet (2.86 or 3.66 meter).



## Options and Accessories (sold separately and availability may vary by country)

#### HP EliteBook 820 G1 Notebook PC

#### Primary Battery 3-cell HP Long Life 26 WHr 3-cell HP Long Life 46 WHr

#### HP EliteBook 840 G1 Notebook PC

#### Primary Battery 3-cell HP Long Life 24WHr 3-cell HP Long Life 50 WHr Secondary Battery 6-cell HP Long Life Slice 60 WHr (optional)

#### HP EliteBook 850 G1 Notebook PC

#### **Primary Battery**

3-cell HP Long Life 24WHr 3-cell HP Long Life 50 WHr

**NOTE**: Battery warranty is one year or three years, depending on the platform warranty.

#### **Battery Life\***

	Configurations with integrated graphics (Windows 7)	Configurations with discrete graphics (Windows 7)
HP EliteBook 820 G1		
3-cell (46 WHr) battery with hard drive	Up to 11 hours 15 minutes	N/A
3-cell (46 WHr) battery with 2.5" solid state drive	Up to 13 hours 15 minutes	N/A
3-cell (26 WHr) battery with 2.5" solid state drive	Up to 7 hours 30 minutes	N/A
HP EliteBook 840 G1		
3-cell (50 WHr) battery with hard drive	Up to 13 hours 15 minutes	Up to 13 hours 15 minutes
3-cell (24 WHr) battery with 2.5" solid state drive	Up to 7 hours	Up to 7 hours 15 minutes
3-cell (50 WHr) battery with 2.5" solid state drive	Up to 15 hours 15 minutes	Up to 14 hours 30 minutes
3-cell (50 WHr) battery + Slice (60 WHr) with 2.5" solid state drive	Up to 33 hours 45 minutes	N/A

#### HP EliteBook 850 G1



### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

## Options and Accessories (sold separately and availability may vary by country)

3-cell (50 WHr) battery<br/>with hard driveUp to 13 hours3-cell (24 WHr) battery<br/>with 2.5" solid state driveUp to 7 hours3-cell (50 WHr) battery<br/>with 2.5" solid state driveUp to 15 hours

Up to 13 hours 15 minutes

Up to 7 hours 15 minutes

Up to 14 hours 30 minutes

#### System Standby Time\*\*

Up to 166 hours UMA, 167 hours discrete

\*\*Windows 7 battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

#### **Power Conservation**

Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode) AMD PowerPlay technology (discrete models) Hibernation Standby ACPI compliance

### **WEIGHTS & DIMENSIONS**

#### HP EliteBook 820 G1 Notebook PC

#### Weight

Starting at 2.94 lb (1.33 kg) Weight will vary by configuration. **Dimensions** (w x d x h) 12.2 x 8.48 x 0.83 in 31 x 21.53 x 2.1 cm

#### HP EliteBook 840 G1 Notebook PC

#### Weight

Starting at 3.48 lb (1.58 kg) (non-Touch) Weight will vary by configuration. Starting at 3.92 lb (1.78 kg) (Touch) Weight will vary by configuration. **Dimensions** (w x d x h) 13.34 x 9.33 x 0.83 in (non-Touch) 33.89 x 23.7 x 2.10 cm (at front) (non-Touch)



Options and Accessories (sold separately and availability may vary by country)

13.34 x 9.33 x 0.89 in (Touch) 33.89 x 23.7 x 2.25 cm (Touch)

HP EliteBook 850 G1 Notebook PC Weight

Starting at 4.15 lb (1.88 kg) Weight will vary by configuration. **Dimensions** (w x d x h) 14.78 x 9.98 x 0.84 in 37.5 x 25.3 x 2.142 cm

### **PORTS/SLOTS**

#### Ports

USB 3.0 – Two for EliteBook 820 USB 3.0 Three for EliteBook 840 and EliteBook 850 USB 3.0 (charging) – One DisplayPort 1.2 – One VGA – One Headphone/Microphone combo port – One RJ-45 (Ethernet) – One Power connector – One Side docking connector – One Secondary battery connector\* – One

#### **Expansion Slots**

Media Card Reader - supports SD, SDHC, SDXC

\* EliteBook 840 only.

### SERVICE AND SUPPORT

Limited 3-year, 1-year and 90-day warranty options available, depending on country, 3-year limited warranty on HP Long Life Battery (only available with 3-year platform warranty). Optional\* HP Care Pack Services\*\* are extended service contracts which go beyond your standard warranties. For more details visit: <u>http://www.hp.com/go/lookuptool</u>.

\*Sold separately or as an optional feature.

\*\* Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. Consult the HP Customer Support Center for details. http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp

**NOTE**: Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <u>www.hp.com/go/cpc</u>



# Options and Accessories (sold separately and availability may vary by country)

**NOTE**: Battery warranty is 1 year or three years, depending on the platform warranty.

### SYSTEM UNIT

Stand-Alone Power	Nominal Operating Voltage	19.5 V		
Requirements (AC Power)	Average Operating Power	Windows 7 (64-bit)	Windows8 (64-bit)	
-	EliteBook 820 Integrated	4.75 W	4.26 W	
	graphics			
	EliteBook 840 Discrete graphics	4.18 W	5.42 W	
	EliteBook 840 Integrated	4.8 W	4.49 W	
	graphics			
	EliteBook 850 Discrete graphics	4.14 W	3.91 W	
	EliteBook 850 Integrated	4.09 W	4.18 W	
	graphics			
	Max Operating Power	Discrete < 90W		
		UMA < 65W		
Temperature	Operating	32° to 95° F (0° to 35° C) (not writ	ing optical)	
		41° to 95° F (5° to 35° C) (writing optical)		
	Non-operating	-4° to 140° F (-20° to 60° C)		
Relative Humidity	Operating	10% to 90%, non-condensing		
	Non-operating	5% to 95%, 101.6° F (38.7° C) ma	ximum wet bulb	
		temperature		
Shock	Operating	40 G, 2 ms, half-sine		
	Non-operating	200 G, 2 ms, half-sine		
Random Vibration	Operating	0.75 grms		
	Non-operating	1.50 grms		
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048		
	Non-operating	-50 to 40,000 ft (-15.24 to 12,19	2 m)	
Planned Industry Standard	UL	Yes		
Certifications	CSA	Yes		
	FCC Compliance	Yes		
	ENERGY STAR <sup>®</sup>	Select models*		
	EPEAT®	Registered Gold in United States*	:*	
	ICES	Yes		
	Australia /	Yes		
	NZ A-Tick Compliance			
	CCC	Yes		
	Japan VCCI Compliance	Yes		
	KC	Yes		
	BSMI	Yes		
	CE Marking Compliance	Yes		
	BNCI or BELUS	Yes		
	CIT	Yes		
	GOST	Yes		
	Saudi Arabian Compliance	Yes		
	(ICCP)			
	SABS	Yes		



# Options and Accessories (sold separately and availability may vary by country)

UKRSERTCOMPUTER

Yes

\* Configurations of the HP EliteBook 820, HP EliteBook 840 and HP EliteBook 850 that are ENERGY STAR<sup>®</sup> qualified are identified as HP EliteBook 820 ENERGY STAR, HP EliteBook 840 ENERGY STAR and HP EliteBook 850ENERGY STAR on HP websites and on <u>www.energystar.gov</u>.

\*\* EPEAT<sup>®</sup> registration varies by country. See <u>www.epeat.net</u> for registration status by country. EPEAT status listed above applies to U.S.

For accessibility information on HP products, please visit: <u>http://www.hp.com/accessibility</u>.

### DISPLAYS

12.5" diagonal LED- backlit HD anti-glare SVA	Outline Dimensions (W x H x D)	11.46 x 7.14 x 0.14 in (29.1	1 x18.14 x 0.36 cm)
flat (1366 x 768)	Active Area	10.89 x 6.12 in (27.6615 x	: 15.552 cm)
	Weight	0.6 lb (270g) (max)	
	Diagonal Size	12.5 in (35.75 cm)	
	Surface Treatment	Anti-glare 300:1 (min)	
	Contrast Ratio		
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Format	1366 x 768 (HD)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (1 lane)	
	LCD Mode	TN	
	PPI	125 ррі	
	Viewing Angle	SVA 40/40/15/30 (Left/Rig	Jht/Down/Up)
12.5" diagonal LED- backlit HD Premium anti-	Outline Dimensions (W x H x D)	11.46 x 7.14 x 0.112 in (29	.1 x18.14 x 0.285 cm)
glare UWVA slim (1366 x	Active Area	10.85 x 6.1 in (27.559 x 15	5.494 cm)
768)	Weight	0.49 lb (220g) (max)	
	Diagonal Size	12.5 in (35.75 cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	500:1 (min)	
	Refresh Rate	60 Hz	
	Brightness	300 nit (typical)	
	Pixel Resolution	Format Configuration	1366 x 768 (HD) RGB Stripe
	Interface	eDP 1.2 (1 lane)	
	LCD Mode	IPS/FFS/VA	



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	PPI	125 ppi UWVA 85/85/85/85 (Left/Right/Down/Up)		
	Viewing Angle			
14" diagonal LED-backlit HD anti-glare SVA flat	(W x H x D)	12.6 x 8.09 x 0.14 in (32.0	9 X 20.56 X 0.36 CM)	
(1366 x 768)	Active Area	12.18 x 6.85 in (30.94 x 1	7.395 cm)	
	Weight	0.71 lb (320g) (max)		
	Diagonal Size	14.0 in (35.6cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	300:1 (min)		
	Refresh Rate	60 Hz		
	Brightness	200 nit (typical)		
	Pixel Resolution	Format	1366 x 768 (HD)	
		Configuration	RGB Stripe	
	Interface	eDP 1.2 (1 lane)		
	LCD Mode	TN		
	<b>PPI</b> 125 ppi			
	Viewing Angle	ing Angle SVA 40/40/15/30 (Left/Ri		
14" diagonal LED-backlit HD+ anti-glare SVA flat	Outline Dimensions (W x H x D)	12.6 x 8.09 x 0.14 in (32.0	9 x 20.56 x 0.36 cm)	
(1600 x 900)	Active Area	12.19 x 6.86 in (30.96 x 1	7.415 cm)	
	Weight	0.72 lb (325 g) (max)		
	Diagonal Size	14.0 in (35.6cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	300:1 (min)		
	Refresh Rate	60 Hz		
	Brightness	250 nit (typical)		
	Pixel Resolution	Format Configuration	1600 x 900 (HD+) RGB Stripe	
	Interface	eDP 1.2 (1 lane)		
	LCD Mode	TN		
	PPI	131 ррі		
	Viewing Angle	SVA 40/40/15/30 (Left/Ri	ght/Down/Up)	
14" diagonal LED-backlit HD+ SVA flat + touch	<b>Outline Dimensions</b> (W x H x D)	12.6 x 8.09 x 0.14 in (32.0	9 x 20.56 x 0.36 cm)	



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

(1600 x 900)	Active Area Weight Diagonal Size Touch enabled TSP Type	12.19 x 6.86 in (30.96 x 17.415 cm) 0.72 lb (325 g) (max) 14.0 in (35.6cm) Yes Capacitive Min 5-point & Max 10-point for Win8 300:1 (min) 60 Hz	
	Touch point supported Contrast Ratio Refresh Rate		
	Brightness	250 nit (typical)	
	Pixel Resolution	Format Configuration	1600 x 900 (HD+) RGB Stripe
	Interface LCD Mode	eDP 1.2 (1 lane) TN	
	PPI Viewing Angle	131 ppi SVA 40/40/15/30 (Left/Rig	ght/Down/Up)
FHD anti-glare UWVA slim	acklit Outline Dimensions 12.6 x 8.09 x 0.12 in (32.09 x 20.56 x 0.3 /A slim (W x H x D)		9 x 20.56 x 0.3 cm)
(1920 x 1080)	Active Area	12.18 x 6.85 in (30.93 x 17.4 cm)	
	Weight	0.75 lb (340 g) (max)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	600:1 (min)	
	Refresh Rate	60 Hz	
	Brightness	300 nit (typical)	
	Pixel Resolution	Format Configuration	1920 x 1080 (FHD) RGB Stripe
	Interface	eDP 1.3+PSR (2 lane)	
	LCD Mode	IPS/FFS/VA	
	PPI	157 ppi	
	Viewing Angle	UWVA 85/85/85/85 (Left/	Right/Down/Up)
15.6" diagonal LED- backlit HD anti-glare SVA	<b>Outline Dimensions</b> (W x H x D)	14.17 x 8.83 x 0.15 in (36.	0 x 22.43 x 0.38 cm)
flat (1366 x 768)	Active Area	13.55 x 7.62 in (34.42 x 19.35 cm)	
	Weight	< 1.1 lb (500 g) (max)	



### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

# Options and Accessories (sold separately and availability may vary by country)

	Diagonal Size	15.6 in (39.62 cm)		
	Surface Treatment	ent Anti-glare		
	Contrast Ratio	300:1 (min)		
	Refresh Rate	60 Hz		
	Brightness	200 nit (typical)		
		Format	1366 x 768 (HD)	
	Pixel Resolution	Configuration	RGB Stripe	
	Interface	eDP 1.2 (1 lane)		
	LCD Mode	TN		
	PPI	101 ppi		
	Viewing Angle	SVA 40/40/15/30 (Left/Ri	Right/Down/Up)	
15.6" diagonal LED- backlit FHD anti-glare	<b>Outline Dimensions</b> (W x H x D)	14.17 x 8.83 x 0.15 in (36.0 x 22.43 x 0.32 cm)		
SVA flat (1920 x 1080)	Active Area	13.55 x 7.62 in (34.42 x 19.36 cm)		
	Weight	< 0.84 lb (380 g) (max)		
	Diagonal Size	15.6 in (39.62 cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	400:1 (typical)		
	Refresh Rate	60 Hz		
	Brightness	300 nit (typical)		
	Pixel Resolution	Format	1920 x 1080 (FHD)	
	FIXEL RESULUTION	Configuration	RGB Stripe	
	Interface	eDP 1.2 (2 lane)		
	LCD Mode	TN		
	PPI	142 ррі		
	Viewing Angle	SVA 45/45/25/35 (Left/Right/Down/Up)		

### **STORAGE AND DRIVES**

**Internal Storage** 

320 GB* 5400 rpm SATA	Drive Weight	0.25 lbs (115 g)
Hard Drive	Capacity	320 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	Transfer Rate Seek Time (typical reads, including settling) Rotational Speed Logical Blocks Operating Temperature Features	Single Track Average Maximum 7200 rpm 625,142,448 32° to 140° F (0° to 60° C) [ ATA Security	300 MB/s (Drive Capability) 1.5 ms 11 ms 22 ms [case temp]
500 GB* 5400 rpm SATA Hard Drive	Drive Weight Capacity Height Width Interface	0.22 lb (101 g) 500 GB 0.37 in (9.5 mm) 2.75 in (70 mm) ATA-8, SATA 2.6, 3.0 Gb/s,	NCQ
	<b>Transfer Rate Seek Time</b> (typical reads, including settling)	Synchronous (maximum) Single Track Average Maximum	300 MB/s (Drive Capability) 3 ms 13 ms 24 ms
	Rotational Speed Logical Blocks Operating Temperature Features	5400 rpm 976,773,168 32° to 140° F (0° to 60° C) [ ATA Security	case temp]
1 TB* 5400 rpm SATA Hard Drive	Drive Weight Capacity Height Width Interface Transfer Rate	0.254 lb (115 g) 1 TB 0.37 in (9.5 mm) 2.75 in (70 mm) ATA-8, SATA 2.6, 3.0 Gb/s Synchronous (maximum)	s, NCQ 300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling) Rotational Speed Logical Blocks Operating Temperature Features	Single Track Average Maximum 5400 rpm 1,953,525,168	3 ms 13 ms 24 ms [case temp]
500 GB* 5400 rpm SATA FIPS** Hard Drive	Drive Weight Capacity Height Width	0.25 lbs (95g) 500 GB 0.28 in (7 mm) 2.75 in (70 mm)	



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	Interface Transfer Rate Seek Time (typical reads, including settling) Cache Rotational Speed Logical Blocks Operating Temperature Features	ATA-8, SATA 2.6, 3.0 Gb/s Synchronous (maximum) Single Track Average Maximum 16 MB 5400 rpm 976,773,168 32° to 140° F (0° to 60° C) ATA Security	300 MB/s (Drive Capability) 1.5 ms 11 ms 22 ms
320 GB* 7200 rpm SATA Hard Drive	Drive Weight Capacity Height Width Interface Transfer Rate Seek Time (typical reads, including settling) Cache Rotational Speed Logical Blocks Operating Temperature Features	0.25 lbs (115 g) 320 GB 0.37 in (9.5 mm) 2.75 in (70 mm) ATA-8, SATA 2.6, 3.0 Gb/s Synchronous (maximum) Single Track Average Maximum 16 MB 7200 rpm 625,142,448 32° to 140° F (0° to 60° C) ATA Security	300 MB/s (Drive Capability) 1.5 ms 11 ms 22 ms
500 GB* 7200 rpm SATA Hard Drive	Drive Weight Capacity Height Width Interface Transfer Rate Seek Time (typical reads, including settling)	0.25 lbs (115g) 500 GB 0.37 in (9.5 mm) 2.75 in (70 mm) ATA-8, SATA 2.6, 3.0 Gb/s, <b>Synchronous</b> (maximum) <b>Single Track</b> <b>Average</b> <b>Maximum</b>	NCQ 300 MB/s (Drive Capability) 1.5 ms 11 ms 22 ms



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	Rotational Speed	7200 rpm		
	Logical Blocks	976,773,168		
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
	Features	ATA Security		
500 GB* 7200 rpm SMAR1	Drive Weight	0.25 lbs (115g)		
SATA II Self Encrypting	Capacity	500 GB		
Drive	Height	0.37 in (9.5 mm)		
	Width	2.50 in (63.5 mm)		
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s		
	Transfer Rate	Synchronous (maximum)	300 MB/s (Drive Capability)	
	Seek Time	Single Track	1 ms	
	(typical reads, including	Average	12 ms	
	settling)	Maximum	20 ms	
	Cache	16 MB		
	Rotational Speed	7200 rpm		
	Logical Blocks	976,773,168		
	Operating Temperature			
	Features	ATA Security		
SATA 6 Gb/s 128 GB*, 2.5	- Drive Weight	73 Grams		
inch Solid State Drive	Capacity	128 GB		
	Height	0.276 in (7 mm)		
	Width	2.76 in (70 mm)		
	Interface	SATA 3 (6 Gb/s)		
	Performance	Maximum Sequential Read	d Maximum Sequential Write	
		415 MB/s	175 MB/s	
	Logical Blocks	250,069,680		
	Operating Temperature	32° to 158°F (0° to 70°C) [c	•	
	Features	ATA Security; ATA-8; SATA	3.0; DIPM; TRIM	
SATA 6 Ch/c 190 CB* 2 5	- Drive Weight	78 Grams		
SATA 6 Gb/s 180 GB*, 2.5- inch SATA Solid State Drive	Capacity	180 GB		
	Height	0.276 in (7 mm)		
	Width	2.76 in (70 mm)		
	Interface	SATA Gen 3 (6 Gb/s)		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 510 MB/s	Up to 470 MB/s	



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	Performance	Maximum Sequential Read	Maximum Sequential Write
	Interface	SATA 3 (6 Gb/s)	
	Width	2.76 in (70 mm)	
5.170	Height	0.276 in (7 mm)	
inch SATA SED Solid State Drive		256 GB	
SATA 6 Gb/s 256 GB*, 2.5-		78 Grams	
	Features		3.0; DIPM; TRIM, TCG Opal Compliant
	Operating Temperature	32° to 158°F (0° to 70°C) [c	ase temp]
	Logical Blocks	351,651,888	Up to 520 MB/s
		<b>Read</b> Up to 550 MB/s	Up to 520 MP/c
	Performance	Maximum Sequential	Maximum Sequential Write
	Interface	SATA Gen 3 (6 Gb/s)	
	Width	2.76 in (70 mm)	
	Height	0.276 in (7 mm)	
	Capacity	180 GB	
SATA 6 Gb/s 180 GB*, 2.5- inch SATA SED Solid State Drive	-	Up to 78 Grams	
	Features	ATA Security; ATA-8, SATA	3.0; DIPM; TRIM
	Operating Temperature	32° to 158°F (0° to 70°C) [c	ase temp]
	Logical Blocks	468,862,128	
		550 MB/s	520 MB/s
	reituillialle	Maximum Sequential Read	Maximum Sequential Write
	Interface Performance	SATA Gen 3 (6 Gb/s)	Maximum Coquential Write
	Width	2.76 in (70 mm)	
	Height	0.276 in (7 mm)	
IIICII Soliu State Di Ive	Capacity	240 GB	
SATA 6 Gb/s 240 GB*, 2.5- inch Solid State Drive	-	78 Grams	
	Security Features	TCG Opal 1 complint	
	Features	ATA Security; ATA-8, SATA	3.0; DIPM; TRIM
	Operating Temperature	32° to 158°F (0° to 70°C) [c	•
	Logical Blocks	351,651,888	_



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

# Options and Accessories (sold separately and availability may vary by country)

	Logical Blocks Operating Temperature Features Security Features	Up to 510 MB/s 500,118,192 32° to 158°F (0° to 70°C) [ ATA Security; ATA-8 comp TCG Opal 2 Compliant	Up to 450 MB/s [case temp] pliant; SATA 3.0; DIPM; TRIM
512 GB 2.5" Solid Sta	te Drive Weight	73 Grams	
Drive	Capacity	512 GB	
	Height	0.276 in (7 mm)	
	Width	2.76 in (70 mm)	
	Interface	SATA 3 (6 Gb/s)	
	Performance	Maximum Sequential Rea	ad Maximum Sequential Write
		Up to 460 MB/s	Up to 260 MB/s
	Logical Blocks	1,000,215,216	
	Operating Temperature	32° to 158°F (0° to 70°C) [	[case temp]
	Features	ATA Security; ATA-8 comp	pliant; SATA 3.0; DIPM; TRIM
SATA 6Gb/s 120 GB*,	Drive Weight	Up to 10 Grams	
2242 M.2 Solid State	Capacity	120 GB	
Drive	Height	0.138 in (3.5mm)	
	Width	0.866 in (22 mm)	
	Interface	M.2 SATA Gen3 (6 Gb/s)	
	Performance	Maximum Sequential Rea	ad Maximum Sequential Write
		Up to 540 MB/s	Up to 520 MB/s
	Logical Blocks	234,441,648	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [	[case temp]
	Features	ATA Security; ATA-8, SATA	A 3.0; DIPM; TRIM
* For hard drives and soli	d state drives, GB = 1 billion	bytes. TB = 1 trillion bytes.	. Actual formatted capacity is less. Up to 16 GB (fo

\* For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software.

\*\* \* FIPS-certified, hardware-based AES-256 encryption image.

### SECURITY

HP Fingerprint Reader	Mobile Voltage Operation 3.0V-3.6V		
(optional)	<b>Operating Temperature</b>	14° – 167°F (-10° – 75°C)	



	Current Consumption Image	36 mA peak	
	Low Latency Wait for Finger	950 uA	
	Capture Rate	6000 lines/sec	
	ESD Resistance	IEC 61000-4-2 4B(±	15KV)
	Detection Matrix	200*1 (plus another 508 dpi 12*3 mm sensor area	
Smart Card Reader	Smart card standard	-	ws smart card standard
	<b>Dimensions</b> (L x W x H)	0.41x 0.08 x 0.32 in (	· · ·
	Smart Card support	ISO 7816 Class A and	
	Smart Card Interface	Support I2C memory	with T = 0 and T = 1 support card, SLE4418, SLE4428, SLE4432, SLE4442, SLE4436, AT88SC1608, AT45D041 card and AT45DB041 card via
	Operating systems	No driver is required operating system.	for this device. Native support is provided by the
	Power	Normal Mode	With card present, before being suspended: 40.9 mA Without card present, before being suspended: 33.16 mA After being suspended with smart card present: 380 µA After being suspended without smart card present: 380 µA
		Power Saving Mode	With card present, before being suspended: 40.6 mA Without card present: 380 μA After being suspended with smart card present: 380 μA
	Features	<ul> <li>Support I2C SLE4436,</li> <li>SLE5536, SL card via external Support ISO</li> <li>Implemente endpoint, M</li> <li>Storage end</li> <li>Built-in PLL</li> </ul>	gle slot T1 protocol memory card, SLE4418, SLE4428, SLE4432, SLE4442, LE6636, AT88SC1608, AT45D041 card and AT45DB041 ernal EEPROM 7816 Class A, B and C (5V/3V/1.8V) card ed as an USB full speed device with bulk transfer ass



## HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

## Options and Accessories (sold separately and availability may vary by country)

iManufacturer/iProduct/Serial Number), Direct Web Page Link, and accessing memory card module.

- EEPROM programmable via USB interface
- Support software update for memory card module
- Support Direct Web Page Link via configuration in external EEPROM
- Support short APDU and extended APDU
- Compatible with Microsoft USB-CCID driver
- Support remote wake up through inserting card/removing card
- Support USB selective suspend
- Support Power Saving Mode (Using one pin to select between Normal/PWR Saving Mode)
- Support card power over current protection mechanism
- Built in resonator.
- Support USB LPM (Link Power Management) features.
- Embedded clock source.

### **Networking/communications**

Intel I218LM Gigabit	Connector	RJ-45		
Network Connection	System Interface	Integrated on PCA		
	Controller	Intel I218LM GbE platform LAN connect networking controller		
	Memory	24 KB FIFO packet buffer memory		
	Data rates supported	10/100/1000 Mbps		
	IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3az		
	Bus architecture	PCI Express and SMBus		
	Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)		
	Power requirement	Requires 3.3V and 0.9V or just 3.3V with integrated regulators Power consumption 0.733 Watts		
	Boot ROM support	Yes		
	Network transfer mode	Full-duplex		
	Network transfer rate	Half-duplex (not supported for the 1000BASE-T transceiver) 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps		



		1000BASE-T (full-duplex) 2000 Mbps
	Environmental	Operating 0° to 85° C
		Temperature:
	Managamant	Operating Humidity: 60% RH
	Management	WOL, auto MDI crossover, PXE, Muti-port teaming, RSS, Advanced cable diagnostic.
	Alerting	ASF 2.0 support; iAMT 9.0 support
HP hs3110/3114 HSPA+ Mobile Broadband Module*	Technology/Operating bands	Modes: WCDMA/HSDPA/HSUPA/HSPA+/AWS/GSM/EDGE/GPRS Penta-band WCDMA/HSDPA/HSUPA/HSPA+/AWS: 850/900/1900/2100/AWS MHz GSM/GPRS/EDGE: 850/900/1800/1900 MHz
	Wireless protocol standards	GSM/GPRS/EDGE: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 7 Advanced Receiver Type 3i
	GPS	GPS Standalone, A-GPS: L1 (Internet- and Network assisted)
	Wireless parametric standards	Complies with 3GPP specifications
	Maximum data rates	GPRS/EDGE: Multi-slot Class 33, Class B WCDMA PS: UL (384 kbps) / DL (384 kbps) UL/DL HSPA: UL (5.76 Mbps)/ DL (7.2 Mbps) UL/DL HSPA+: UL (5.76 Mbps)/ DL (21Mbps)
	Maximum output power	WCDMA/HSPA/HSPA+ 2100/1900/900/850/AWS MHz: +24dBm (Power Class 3) GPRS 1900/1800 MHz: +30dBm (Power Class 1) GPRS 900/850 MHz: +33dBm (Power Class 4) EDGE 1900/1800 MHz: +26dBm (Power Class E2) EDGE 900/850 MHz: +27dBm (Power Class E2)
	Maximum power consumption	2500mA (peak); 600mA (average)
	Power consumption, sleep mode	3.6 mA
	Power management	USB selective suspend, Connected Standby Integrated notebook wireless button
	Antenna type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	M.2 Socket 2, USB 2.0 interface high speed
	Weight	<6 g
	<b>Dimensions</b> (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (42 x 30 x 2.3 mm)
	SIM card supply voltage	1.8 V/3.0 V UICC (SIM/UICC/USIM)
	Voltage, Operating	3.135V~4.4V (3.3 V recommended)



### Options and Accessories (sold separately and availability may vary by country)

Temperature, operating	14° to 131° F (-10° to 55° C) (Normal operation) -4° to 158° F (-20° to 70° C) (Extended operation)
Temperature, storage	-40° to 185° F (-40° to 85° C)
Humidity	5% to 95%
<b>Configuration utilities</b>	HP Connection Manager
LED activity	LED Off - Radio Off; Solid LED On - Radio On

\* Mobile Broadband is an optional feature sold separately or as an add on feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

HP lt4111 LTE/EV- DO/HSPA+ Gobi 4G WWAN*	Technology/Operating bands	LTE FDD all bands with diversity: 1900 MHz (Band II) <sup>1</sup> , 1700/2100MHz (Band IV (AWS), 850 MHz (Band V), 700MHz (Band XIII), 700MHZ (Band XVII), 1900MHz G Block (Band XXV) WCDMA/HSDPA/HSUPA/HSPA+: all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II), AWS 1700/2100MHz (Band IV), 850 MHz (Band V), 800 MHz (Band VIII) GSM/GPRS/EDGE: 1900 MHz, 1800 MHz , 850 MHz , 900 MHz CDMA: Cellular 800MHz (BCO), PCS 1900MHz (BC1)
	Wireless protocol standards	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification EVDO Release 0 and Release A
	Wireless parametric standards	Complies with 3GPP specifications Release 8 for LTE
	Maximum data rates	LTE (Category 3): 100 Mbps (Download), 50Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
	GPS	Standalone GPS, A-GPS, GPS XTRA
	GPS bands	1575.42 MHz (± 1.023 MHz), GLONASS 1596-1607MHz
	Maximum output power	LTE: +23 dBm (+/- 1 dBm) WCDMA: +23 dBm (+/- 1 dBm) GSM850/900, GMSK: +32dBm (+/- 1dBm) GSM850/900, 8PSK: +27dBm (+/- 1dBm) DCS1800 / PCS 1900, GMSK: +29dBm (+/- 1dBm) DCS1800 / PCS 1900, 8PSK: +26dBm (+/- 1dBm) CDMA: +24dBm (+/- 1dBm)
	Maximum power consumption	LTE: 1,200 mA (peak); <900 mA (average) WCDMA: 1,100 mA (peak); <800 mA (average) EGPRS: 2,500 mA (peak); <700 mA (average)
	Power consumption, sleep mode	2 mA



### Options and Accessories (sold separately and availability may vary by country)

Power management Antenna type	USB selective suspend, Integrated notebook wireless button Dual high efficiency multi-band antennae with spatial diversity	
Form Factor	M.2, 3042-S3 Key B	
Weight	6 g	
<b>Dimensions</b> (Length x Width x Thickness)	42 mm × 30 mm × 2.3 mm	
Voltage, Operating	3.135 V to 4.4 V (3.3 V +1.1V/-0.165V)	
Temperature, operating (from TIA/EIA/IS-98-D)	-13° to 140° F (–25° to 60° C)	
Temperature, non- operating, 96 hours (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)	
Humidity, non-operating	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)	
LED activity	LED Off – Radio Off; Solid LED On – Radio On	
firmware update. * 4G LTE not available on al processors. WWAN use req	50 MHz (Band V) not supported at launch but support planned in a future Il products, in all regions and only available on products featuring Intel uires separately purchased service contract. Check with service provider for a your area. Connection speeds will vary due to location, environment, her factors.	
Technology/Operating bands	LTE FDD all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II), 1800 MHz (Band III), 850 MHz (Band V), 2600 MHz (Band VII), 900 MHz (Band VIII), 800 MHz (Band XX, DD800) WCDMA/HSDPA/HSUPA/HSPA+ all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II), 800 MHz (Band V), 900 MHz (Band VIII) GSM/GPRS/EDGE: 1900 MHz (Band II), 1800 MHz (Band III), 850 MHz (Band V), 900 MHz (Band VIII)	
Wireless protocol standards	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification	
Wireless parametric standards	Complies with 3GPP specifications Release 8 for LTE	
Maximum data rates	LTE (Category 3): 100 Mbps (Download), 50Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)	
GPS	Chandeland	
	Standalone	
GPS bands	1575.42 MHz (± 1.023 MHz), GLONASS 1596-1607MHz	



HP lt4112 LTE/HSPA+ Gobi 4G Module\*\*

### Options and Accessories (sold separately and availability may vary by country)

	Maximum power	GPRS Band II, III: +29.5 dBm (+/- 1 dBm) GPRS Band V, VIII: +32.5 dBm (+/- 1 dBm) EGPRS Band II, III: +26.5 dBM (+/-1.5 dBm) EGPRS Band V, VIII: +27.5 dBM (+/-1.5 dBm) LTE: 1,200 mA (peak); <900 mA (average)	
	consumption	WCDMA: 1,100 mA (peak); <800 mA (average) EGPRS: 2,800 mA (peak); <700 mA (average)	
	Power consumption, sleep mode	3 mA	
	Power management	USB selective suspend, Integrated notebook wireless button	
	Antenna type	Dual high efficiency multi-band antennae with spatial diversity	
	Form Factor	M.2, USB 2.0 interface	
	Weight	6 g	
	<b>Dimensions</b> (Length x Width x Thickness)	42 mm × 30 mm × 2.3 mm	
	Voltage, Operating	3.135 V to 4.4 V (3.3 V +1.1V/-0.165V)	
	<b>Temperature, operating</b> (from TIA/EIA/IS-98-D)	14° to 131° F (–10° to 55° C)	
	Temperature, non- operating, 96 hours (from MIL-STD 202 Method 108)		
	Humidity, non-operating	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)	
	LED activity	LED Off - Radio Off; Solid LED On - Radio On	
	processors. WWAN use req	all products, in all regions and only available on products featuring Intel quires separately purchased service contract. Check with service provider for in your area. Connection speeds will vary due to location, environment, other factors.	
Broadcom 802.11	Wireless LAN Standards		
a/b/g/n (2x2) with		IEEE 802.11b	
Bluetooth <sup>®</sup> v4.0		IEEE 802.11g	
combo*		IEEE 802.11n	
	Interoperability Executions Rand	Wi-Fi certified	
	Frequency Band	802.11b/g/n • 2.402 – 2.482 GHz	
		802.11a/n	
		• 4.9 – 4.95 GHz (Japan)	
		• 5.15 – 5.25 GHz	
		• 5.25 – 5.35 GHz	
		• 5.47 – 5.725 GHz	
		• 5.825 – 5.850 GHz	
		• 2.402 – 2.482 GHz	



Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
	802.11b: 1, 2, 5.5, 11 Mbps	
	802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
	802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)	
Modulation	Direct Sequence Spread Spectrum	
	BPSK, QPSK, CCK, 16-QAM, 64-QAM	
Security <sup>1</sup>	<ul> <li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g</li> </ul>	
	mode only	
	AES-CCMP: 128 bit in hardware	
	802.1x authentication	
	<ul> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> </ul>	
	WPA2 certification	
	• IEEE 802.11i	
	<ul> <li>Cisco Certified Extensions, all versions through V5</li> </ul>	
	• WAPI	
Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power <sup>2</sup>	• 2.4G: +13.5dBm minimum	
	• 5G: +12dBm minimum	
	<ul> <li>Maximum output power must be able to achieve modular</li> </ul>	
	regulatory certification with notebooks that have antennas >20cm	
	from the user and peak gain of +3dBi at 2.4GHz and +4dBi at 5GHz	
Power Consumption	Transmit: 2.0 W (max)	
	Receive: 1.6 W (max)	
	Idle mode (PSP): 250 mW (WLAN Associated)	
	Idle mode: 100 mW (WLAN unassociated)	
<b>.</b> .	Radio disabled: 75 mW	
Power Management	ACPI and PCI Express compliant power management	
D	802.11 compliant power saving mode	
Receiver Sensitivity <sup>3</sup>	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88	
	dBm (11 Mbps)	
	802.11a/g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85	
	dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48	
	Mbps), -74 dBm (54 Mbps)	
	802.11n:-69 dBm (72.2 Mbps), -66 dBm (300 Mbps)	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display	
• • ·	enclosure	
	Two embedded dual band 2.4/5 GHz antennas are provided to the card to	



### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	support WLAN MIMO communications and Bluetooth communications		
Form Factor	PCI-Express Half-MiniCard		
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)		
Weight	3.1g		
Operating Voltage	3.3v +/- 9%		
Temperature	Operating	14° to 158° F (–10° to 70° C)	
	Non-operating	–40° to 176° F (–40° to 80° C)	
Humidity	Operating	10% to 90% (non-condensing)	
	Non-operating	5% to 95% (non-condensing)	
Altitude	Operating	0 to 10,000 ft (3,048 m)	
	Non-operating	0 to 50,000 ft (15,240 m)	
LED Activity	LED Off – Radio OFF; Soli	id LED On – Radio ON	
		lates on supported security features.	
		y according to local regulations.	
		error rate of 8% for 802.11b (CKK modulation) and	
Bluetooth Specification	e of 10% for 802.11a/g (0	FDM modulation).	
V4.0 High Speed, V2.1+EDF	R. backwards compatible v	vith V1.1. 1.2 and 2.0	
Number of Available	79 (1 MHz) available cha		
Channels			
Data Rates and	3 Mbps data rate; throu	ghput up to 2.17 Mbps	
Throughput			
	Synchronous Connectio	n Oriented links up to 3, 64 kbps, voice channels	
	Asynchronous Connection	on Less links 2178.1 kbps/177.1 kbps asymmetric	
	or 1306.9 kbps symmetric		
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)		
Receiver Sensitivity Power Consumption	Better than -80 dBM at 0.1 % raw bit error rate Peak (Tx) 330 mW		
rower consumption	Peak (Rx) 230 mW		
	Sleep <17 mW		
Antenna	Internally integrated within module		
Range	Up to 33 ft (10 m)		
Electrical Interface	USB 2.0 compliant		
Bluetooth Software	Microsoft Windows Plug and Play compliant		
Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software		
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves		
Security	Full support of Bluetooth Security Provisions		
Power Management	Microsoft Windows ACPI, and USB Bus Support		
		imize power conservation in all operating modes,	
Certifications	including Standby, Hold		
	FCC (47 CFR) Part 15C, S	/ approvals for supported countries, including: action 15 247 & 15 249	
	ETS 300 328, ETS 300 8		
	Low Voltage Directive IE		



Bluetooth Profiles Supported	UL, CSA, and CE Mark Generic Access Profile (GAP) Service Discovery Application Profile (SDAP) Serial Port Profile (SPP) Dial_Up Networking Profile (DUN) Generic Object Exchange Profile (GOEP) Object Push Profile (OPP) File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) Personal Area Networking Profile (PAN) Human Interface Device Profile (HID) Generic Audio/Video Distribution Profile (GAVDP) Advanced Audio/Video Distribution Profile (A2DP) FAX Profile (FAX) Basic Imaging Profile (BIP)
	Basic Imaging Profile (BIP)
	Headset Profile (HSP) Hands Free Profile (HFP)
	Basic Printing Profile (BPP)
	VDP (Video Distribution Profile)
	AVRCP (Audio Video Remote Control Profile)
* Wireless access point and limited.	internet service required. Availability of public wireless access points

Intel Dual Band Wireless- Wireless LAN Standards N 7260AN 802.11 a/b/g/n (2x2) + Bluetooth 4.0 Combo Adaptor *		IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n	
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at: <u>http://www.hp.com/go/notebooks/WLAN</u> )	
	Frequency Band	802.11b/g/n	2.402 - 2.482 GHz
		802.11a/n	4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz
	Antenna Structure	2 transmit; 2 receive (2	x2)
Data Rates			lbps
	Modulation	Direct Sequence Spread CCK, BPSK, QPSK, 16-Q	•
	Security <sup>1</sup>		compliant 64 / 128 bit WEP encryption for a/b/g

### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	<ul> <li>mode only</li> <li>AES-CCMP: 128 bit in hardware</li> </ul>		
	<ul> <li>802.1x authentication</li> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>WPA2 certification</li> </ul>		
	<ul> <li>IEEE 802.11i</li> <li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>WAPI</li> </ul>		
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.		
Network Architecture	Ad-hoc (Peer to Peer)		
Models	Infrastructure (Access Point Required)		
Roaming	IEEE 802.11 compliant roaming between band Access Points		
Output Power <sup>2</sup>	○ 2.4G: +13.5dBm minimum		
-	<ul> <li>5G: +12dBm minimum</li> </ul>		
Power Consumption	Transmit: 2.0 Watts		
-	Receive: 1.6 Watts		
	Idle mode <sup>3</sup> : 250 mW (WLAN Associated)		
	Idle mode: 100 mW (WLAN unassociated)		
	Radio off: 75 mW		
Power Management	ACPI and PCI Express compliant power management		
	802.11 compliant power saving mode		
Receiver Sensitivity <sup>4</sup>	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)		
	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)		
	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)		
	802.11n + 60 dPm (1E0 Mbpc) = 66 dPm (200 Mbpc)		
Antenna Connections	802.11n:-69 dBm (150 Mbps), -66 dBm (300 Mbps)		
Form Factor	2 U.FL type connectors (output impedance of 50 $\pm$ 2 ohms)		
Dimensions	PCI-Express Half-MiniCard		
	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)		
Weight	3.1g		
Operating Voltage	3.3v +/- 9%		
Temperature	Operating 14° to 158° F (-10° to 70° C)		
11	Non-operating -40° to 176° F (-40° to 80° C)		
Humidity	Operating 10% to 90% (non-condensing)		
Altitude	Non-operating 5% to 95% (non-condensing)		
Altitude	Operating         0 to 10,000 ft (3,048 m)           Non-operating         0 to 50,000 ft (15,240 m)		
	Non-operating 0 to 50,000 ft (15,240 m)		



### Options and Accessories (sold separately and availability may vary by country)

#### **LED Activity**

LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.

2. Maximum output power may vary by country according to local regulations.

3. In Power Save Polling mode and on battery power.

4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

#### rated Module with Rivetooth 4.0+EDP Wireless Techn IID Inte

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology			
Bluetooth Specification	4.0+EDR Compliant		
Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)		
Frequency Band	2402 to 2480 MHz		
Number of Available	79 (1 MHz) available channels		
Channels			
Data Rates and Throughpu	<b>t</b> 3 Mbps data rate; throughput up to 2.17 Mbps		
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels		
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or		
	1306.9 kbps symmetric		
Transmit Power	-1.5 dBm to 4 dBm (Bluetooth Class II)		
Receiver Sensitivity	Better than -20 dBM at 0.1 % raw bit error rate		
Power Consumption	Peak (Tx) 264 mW		
	Peak (Rx) 231 mW		
	Sleep <1 mW		
Antenna	Internally integrated within module		
Range	Up to 33 ft (10 m)		
Electrical Interface	USB 2.0 compliant		
	Microsoft Windows Plug and Play compliant		
Bluetooth Software	Broadcom Bluetooth for Windows		
Supported	Microsoft Windows Bluetooth Software		
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves		
Security	Full support of Bluetooth Security Provisions		
Power Management	Microsoft Windows ACPI, and USB Bus Support		
	Self configurable to optimize power conservation in all operating modes,		
	including Standby, Hold, Park, and Sniff		
Certifications	All necessary regulatory approvals for supported countries, including:		
	FCC (47 CFR) Part 15C, Section 15.247 & 15.249		
	ETS 300 328, ETS 300 826		
	Low Voltage Directive IEC950		
	-		

**Bluetooth Profiles** Supported



UL, CSA, and CE Mark

Serial Port Profile (SPP)<sup>1</sup>

Dial-Up Networking (DUN)<sup>1,2</sup>

Service Discovery Application Profile (SDAP)

Generic Object Exchange Profile (GOEP)<sup>1,2</sup>

### Options and Accessories (sold separately and availability may vary by country)

	2. indicates the profile is pa	Object Push Profile (OPP) <sup>1,2</sup> File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) <sup>1,2</sup> Personal Area Networking Profile (PAN) <sup>1,2</sup> Human Interface Device Profile (HID) <sup>1,2</sup> FAX Profile (FAX) Basic Imaging Profile (BIP) <sup>2</sup> Headset Profile (HSP) Hands Free Profile (HSP) Advanced Audio Distribution Profile (A2DP) Pported by Microsoft Windows XP SP2 art of Windows Vista internet service required. Availability of public wireless access points limited.	
Intel Dual Band Wireless-AC 7260 802.11 ac (2x2) + BT 4.0	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g	
combo Adapter*		IEEE 802.11n	
• • • •		IEEE 802.11ac	
	Interoperability	Wi-Fi certified	
	Frequency Band	802.11b/g/n	
		• 2.402 – 2.482 GHz	
		802.11a/n	
		• 4.9 – 4.95 GHz (Japan)	
		• 5.15 – 5.25 GHz	
		• 5.25 – 5.35 GHz	
		• 5.47 – 5.725 GHz	
		• 5.825 – 5.850 GHz	
		<ul> <li>2.402 – 2.482 GHz</li> </ul>	
	Data Rates	<ul> <li>802.11b: 1, 2, 5.5, 11 Mbps</li> </ul>	
	Data Nates	<ul> <li>802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> </ul>	
		<ul> <li>802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> </ul>	
		<ul> <li>802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> </ul>	
		<ul> <li>802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul>	
	Modulation	Direct Sequence Spread Spectrum	
		BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM	
	Security <sup>1</sup>	• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g	
	Jecunity	mode only	
		AES-CCMP: 128 bit in hardware	
		802.1x authentication	



### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

	• WPA, WPA2: 80	2.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.	
	WPA2 certification		
	• IEEE 802.11i		
		Extensions, all versions through CCX4 and CCX Lite	
	• WAPI		
Network Architecture	Ad-hoc (Peer to Peer)		
Models	Infrastructure (Access Po	-	
Roaming Output Rower <sup>2</sup>		paming between access points	
Output Power <sup>2</sup>			
	• 5G: +12dBm mi		
	•	ut power must be able to achieve modular	
		fication with notebooks that have antennas >20cm	
Power Consumption	Transmit: 2.0 W (max)	nd peak gain of +3dBi at 2.4GHz and +4dBi at 5GHz	
rower consumption	Receive: 1.6 W (max)		
	Idle mode (PSP): 250 m	N (WI AN Associated)	
	Idle mode: 100 mW (WL		
	Radio disabled: 75 mW		
Power Management	ACPI and PCI Express compliant power management		
	802.11 compliant power saving mode		
Receiver Sensitivity <sup>3</sup>	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)		
	u2(		
	802.11a/g:-90 dBm (6 M	bps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85	
	dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48		
	Mbps), -74 dBm (54 Mbps)		
	<b>/_ / / / /</b>		
• · · ·	802.11n:-69 dBm (72.2 Mbps), -66 dBm (300 Mbps)		
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure		
	Two embedded dual band 2.4/5 GHz antennas are provided to the card to		
		nmunications and Bluetooth communications	
Form Factor	PCI-Express Half-MiniCard		
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)		
Weight	3.1g		
Operating Voltage	3.3v +/- 9%	14° to 158° 5 ( 10° to 70° C)	
Temperature	Operating Non-operating	14° to 158° F (–10° to 70° C) –40° to 176° F (–40° to 80° C)	
Humidity	Operating	10% to 90% (non-condensing)	
	Non-operating	5% to 95% (non-condensing)	
Altitude	Operating	0 to 10,000 ft (3,048 m)	
	5	/	



LED Activity	Non-operating 0 to 50,000 ft (15,240 m) LED Off – Radio OFF; Solid LED On – Radio ON
2. Maximun 3. Receiver	test software/driver release for updates on supported security features. n output power may vary by country according to local regulations. sensitivity is measured at a packet error rate of 8% for 802.11b (CKK ion) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
<b>Bluetooth Specification</b>	-,,
-	R, backwards compatible with V1.1, 1.2 and 2.0
Number of Available	79 (1 MHz) available channels
Channels	
Data Rates and	3 Mbps data rate; throughput up to 2.17 Mbps
Throughput	5 Hops data rate, throughput up to 2.17 Hops
inoughput	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels
	Asynchronous Connection Loss links 2170 1 khos/177 1 khos asymmetric
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBM at 0.1 % raw bit error rate
Power Consumption	
Power consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW
Antenna	Sleep <17 mW
	Internally integrated within module
Range Electrical Interface	Up to 33 ft (10 m)
Electrical interface	USB 2.0 compliant Microsoft Windows Dlug and Dlay compliant
Blueteeth Coftuere	Microsoft Windows Plug and Play compliant Broadcom Bluetooth for Windows
Bluetooth Software	Microsoft Windows Bluetooth Software
Supported	
Link Topology Security	Point to Point, Multipoint Pico Nets up to 7 slaves
	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support
	Self-configurable to optimize power conservation in all operating modes,
Certifications	including Standby, Hold, Park, and Sniff All necessary regulatory approvals for supported countries, including:
certifications	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
	ETS 300 328, ETS 300 826
	Low Voltage Directive IEC950
	UL, CSA, and CE Mark
Bluetooth Profiles	Generic Access Profile (GAP)
Supported	Service Discovery Application Profile (SDAP)
Supported	Serial Port Profile (SPP)
	Dial_Up Networking Profile (DUN)
	Generic Object Exchange Profile (GOEP)
	Object Push Profile (OPP)
	File Transfer Profile (FTP)
	Synchronization Profile (SYNC)
	Hard Copy Cable Replacement (HCRP)
	Personal Area Networking Profile (PAN)
	Human Interface Device Profile (HID)



* Wireles	ss access point and i	Advanced Au FAX Profile (F Basic Imaging Headset Prof Hands Free P Basic Printing VDP (Video D AVRCP (Audio	dio/Video Distri FAX) g Profile (BIP) iile (HSP) rofile (HFP) g Profile (BPP) istribution Profi o Video Remote	ition Profile (GAVDP) bution Profile (A2DP) ile) Control Profile) lability of public wireless access	s points limited.
Intel Dual Band Wireless-N Wireles 7260NB 802.11 a/b/g/n (2x2) Adapter*		IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n Wi-Fi certified			
		Wille			
Frague			a and XP (details	Program compliant with Micro s at: <u>http://www.hp.com/go/not</u> 2.402 - 2.482 GHz	
i i cque	•	802.11a/n	4 5 5 5	I.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz	
Antenn	a Structure	2 transmit; 2 r	eceive (2x2)		
Data Ra		802.11b: 1, 2, 802.11g: 6, 9, 802.11n: card	12, 18, 24, 36, 4 will support rat	-	
Modula			ce Spread Spect SK, 16-QAM, 64		
Securit	<b>y</b> 1	<ul> <li>IEEE a only</li> <li>AES-C</li> <li>802.1</li> <li>WPA,</li> <li>WPA2</li> <li>IEEE a</li> <li>Cisco</li> <li>WAPI</li> </ul>	and WiFi compliant CCMP: 128 bit in Exauthenticatio WPA2: 802.1x. Certification 802.11i Certified Extens	ant 64 / 128 bit WEP encryption hardware n WPA-PSK, WPA2-PSK, TKIP, and sions, all versions through CCX4	and CCX Lite
Sub-ch	I	regulations.		equency bands and channels cor	npliant to local
Networ	k Architecture	Ad-hoc (Peer t	o Peer)		



### Options and Accessories (sold separately and availability may vary by country)

Models	Infrastructure (Acces	s Point Reauired)	
Roaming	IEEE 802.11 compliant roaming between band Access Points		
Output Power <sup>2</sup>	<ul> <li>2.4G: +13.5dBm minimum</li> <li>5G: +12dBm minimum</li> </ul>		
Power Consumption	Transmit: 2.0 Watts		
	Receive: 1.6 Watts	· · · · ·	
	Idle mode <sup>3</sup> : 250 mW (		
	Idle mode: 100 mW (\ Radio off: 75 mW	NLAN UNASSOCIATEO)	
Power Management	ACPI and PCI Express	compliant power management	
Dessiver Consistivity 4	802.11 compliant por	-	
Receiver Sensitivity <sup>4</sup>		Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm 24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74	
	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBn (11 Mbps) 802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)		
	802,11n:-69 dBm (15	0 Mbps), -66 dBm (300 Mbps)	
Antenna Connections		rs (output impedance of 50 $\pm$ 2 ohms)	
Form Factor	PCI-Express Half-Min	• •	
Dimensions	0.12 x 1.06 x 1.18 in (	(3.1 x 26.8 x 30.0 mm)	
Weight	3.1g		
Operating Voltage	3.3v +/- 9%		
Temperature	Operating	14° to 158° F (-10° to 70° C)	
	Non-operating	-40° to 176° F (-40° to 80° C)	
Humidity	Operating	10% to 90% (non-condensing)	
A1	Non-operating	5% to 95% (non-condensing)	
Altitude	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)	
LED Activity		F; Solid LED On - Radio ON	
	LED AITIDEI - KAUIU UI	I, JULIA LED ULI - NAULU UN	

1. Check latest software/driver release for updates on supported security features.

2. Maximum output power may vary by country according to local regulations.

3. In Power Save Polling mode and on battery power.

4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

\* Wireless access point and internet service required. Availability of public wireless access points limited.



### Options and Accessories (sold separately and availability may vary by country)

### AUDIO/MULTIMEDIA - DTS SOUND+

Hardware	Implementation	IDT 92HD91	
	Function Key Volume Controls	Volume up, volume down,	, and mute
	Full Duplex	Yes	
	Microphone In	Stereo	
	Headphone/Line Out	Stereo	
	Integrated Microphone	Yes, dual digital micropho	ne array
Audio Output Quality	Frequency Response	20 Hz – 20 kHz	
	Signal to Noise Ratio	>85 dB	
	Total Harmonic Distortion	0.01%	
	Noise Floor	–110 dB	
	Play/Record Sampling Rate(s)	8 kHz – 48kHz	
	DAC	16, 20 or 24-bit	
	ADC	16 or 20-bit	
Integrated Stereo	Power Rating	2 Watts	
Speakers	Impedance	4 Ohms	
Power			
HP 45W Smart AC Adapter	Dimensions	3.78 x 1.95 x 0.88 in (9.6 x	: 4.95 x 2.24 cm)
	Input	90 to 265 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
	0	Input AC current	1.4 A at 90 VAC and maximum load
	Output	Output power DC output	45W 19.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<8A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates wit	
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)
		Non-operating (storage) temperature	-4° to 121° F (-20° to 85° C)



	EMI and Safety Certifications	standards - IEC60950, EN - C-UL-US, NORDICS, DENA	0 to 16,405 ft (0 to 5,000 m) 0% to 95% 0% to 95% with LVD and EMC directives; Worldwide safety 60950, UL60950, Class1, SELV; Agency approvals AN, EN55022 Class B, FCC Class B, CISPR22 Class B, lity - failure rate of less than 0.1% annually within eration.
HP 65W EM Smart AC	Dimensions	4.98 x 1.97 x 1.18 in (12.6	5 x 5.0 x 3.0 cm)
Adapter	Weight	0.62 lb (290 g) max	
	Input	90 to 265 VAC	
	•	Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC
	Output	Output power	65W
		DC output	19.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates wi	th interchangeable cords
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)
		Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 95%
		Storage Humidity	10% to 95%
	EMI and Safety Certifications	standards - IEC60950, EN - C-UL-US, NORDICS, DENA	with LVD and EMC directives; Worldwide safety 60950, UL60950, Class1, SELV; Agency approvals AN, EN55022 Class B, FCC Class B, CISPR22 Class B, over 200,000 hours at 25°C ambient condition.
HP 65W Smart AC	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x	( 4.7 x 2.8 cm)
Adapter	Weight	0.62 lb (280 g)	
	Input	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
	Output	Output power	65W



		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	· <11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates wi	ith interchangeable cords
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	standards - IEC60950, EN - C-UL-US, NORDICS, DEN	with LVD and EMC directives; Worldwide safety 60950, UL60950, Class1, SELV; Agency approvals AN, EN55022 Class B, FCC Class B, CISPR22 Class F - over 200,000 hours at 25°C ambient condition.
3-cell HP Long Life	<b>Dimensions</b> (H × W × L)	0.85 x 1.76 x 10.59 in (2.1	16 x 4.46 x 26.9cm)
(24WHr) Lithium-Ion	Weight	169.3 g	
Polymer	Cells/Type	3-cell Lithium-Ion Polyme	er
	Energy	Voltage	11.1
		Amp-hour capacity	4.4Ah
		Watt-hour capacity	24Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F(-10° to 50° C)
		Non-operating	-4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode	2.5 hours
	Fuel Gauge LED	No	
	Warranty	1 year or 3 years* *Battery warranty depend	ds on the platform warranty.
	Optional Travel Battery Available	No	
3-cell HP Long Life	<b>Dimensions</b> (H × W × L)	0.85 x 1.76 x 10.59 in (2.1	16 x 4.46 x 26.9 cm)
(26WHr) Lithium-Ion	Weight	168.5 g	
Polymer	Cells/Type	3-cell Lithium-Ion Polyme	er
	Energy	Voltage	11.1
		Amp-hour capacity	4.4Ah
		Watt-hour capacity	26.3Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		World Wide – May 2014	Page 5

		Operating (Discharging)	14° to 122° F(-10° to 50° C)
	D-44	Non-operating	-4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode	2.5 hours
	Fuel Gauge LED	No	
	Warranty	1 year or 3 years* *Battery warranty depend	s on the platform warranty.
	Optional Travel Battery Available	No	
3-cell HP Long Life	<b>Dimensions</b> (H x W x L)	0.85 x 1.76 x 10.59 in (2.1	6 x 4.46 x 26.9cm)
(46WHr) Lithium-Ion	Weight	259 g	
Polymer	Cells/Type	3-cell Lithium-Ion Polyme	r
	Energy	Voltage	11.1
		Amp-hour capacity	4.4Ah
		Watt-hour capacity	46Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F(-10° to 50° C)
		Non-operating	-4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode	3 hours
	Fuel Gauge LED	No	
	Warranty	1 year or 3 years* *Battery warranty depend	s on the platform warranty.
	Optional Travel Battery Available	No	
3-cell HP Long Life	Dimensions (H × W × L)	0.85 x 1.76 x 10.59 in (2.1	6 x 4.46 x 26.9 cm)
(50WHr) Lithium-Ion	Weight	262 g	
Polymer	Cells/Type	3-cell Lithium-Ion Polyme	r
	Energy	Voltage	11.1
		Amp-hour capacity	4.4Ah
		Watt-hour capacity	50Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F(-10° to 50° C)
	_	Non-operating	-4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode	3 hours
	Fuel Gauge LED	<b>Standby Mode</b> No	
	ruci Vauye LEV	NU	



### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

### Options and Accessories (sold separately and availability may vary by country)

	Warranty	1 year or 3 years* *Battery warranty depends on	the platform warranty.
	Optional Travel Battery Available	Νο	
HP 6-cell Lithium-Ion Long Life Slice Battery	<b>Dimensions</b> (h x w x l)	0.28 x 12.6 x 8.39in (0.7 x 3	32 x 21.3 cm)
(60 WHr)	Weight	1.72 lb (0.78 kg)	
	Cells/Type	6-cell Lithium-Ion	
	Energy	Voltage	11.4V
		Amp-hour capacity	5.4Ah
		Watt-hour capacity	60Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F(-10° to 50° C)
		Non-operating	-4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode	3.5 to 5 hours
		System ON	4 to 7 hours
	Fuel Gauge LED	No	
	Optional Travel Battery Available	No	

#### **ENVIRONMENTAL**

Eco-Label This product has received or is in the process of being certified to the following approvals and may be Certifications labeled with one or more of these marks: & Declarations IT ECO declaration •

- US ENERGY STAR® •
- EPEAT Gold registered in the United States. See http://www.epeat.net for registration • status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

#### HP EliteBook 820 G1 Notebook PC

**Energy Consumption** (in accordance with US **ENERGY STAR® test** method)

115VAC, 60Hz

230VAC, 50Hz

100VAC, 60Hz



#### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

### Options and Accessories (sold separately and availability may vary by country)

Normal Operation (Short idle)	6.9 W	7.2 W	7. W
Normal Operation (Long idle)	5.1 W	5.2 W	5.2 W
Sleep	0.6 W	0.7 W	0.6 W
Off	0.3 W	0.3 W	0.3 W

#### NOTE:

Energy efficiency data listed is for an ENERGY STAR<sup>®</sup> compliant product if offered within the model family. HP computers marked with the ENERGY STAR<sup>®</sup> Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR<sup>®</sup> specifications for computers. If a model family does not offer ENERGY STAR<sup>®</sup> compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows<sup>®</sup> operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	24 BTU/hr	25 BTU/hr	24 BTU/hr
Normal Operation	17 BTU/hr	18 BTU/hr	18 BTU/hr
(Long idle)			
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
2.9	23
3.1	24
	(LWAd, bels) 2.9

#### Longevity and Upgrading

**Doctared Naice Emissions** 

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port



### Options and Accessories (sold separately and availability may vary by country)

Batteries	<ul> <li>Optiona</li> <li>1 multi</li> <li>Interch</li> <li>Spare parts are production.</li> <li>This battery(s) in</li> </ul>	MM memory slots al expansion base docking station -bay II storage port angeable HDD available throughout the warranty period and n this product comply with EU Directive 2006/6 n the product do not contain:	
		y greater the1ppm by weight m greater than 20ppm by weight	
Additional Information	Battery type: This pro- directiv This HP (WEEE) This pro- Drinkin This pro- www.e Plastics ISO104 This pro- USO104	hium cell high capacity Lithium-Ion battery (optional oduct is in compliance with the Restrictions of e - 2011/65/EC. product is designed to comply with the Waste Directive – 2002/96/EC. oduct is in compliance with California Propositi g Water and Toxic Enforcement Act of 1986). oduct is in compliance with the IEEE 1680 (EPE peat.net s parts weighing over 25 grams used in the pro	Hazardous Substances (RoHS) Electrical and Electronic Equipment fon 65 (State of California; Safe AT) standard at the Gold level, see duct are marked per ISO11469 and blastic (by wt.)
Packaging Materials	External:	PAPER/Corrugated	600.9 g
	Internal:	PLASTIC/EPE (Expanded Polyethylene)	34.3 g
		PLASTIC/Polyethylene low density	27.2 g
	The PLASTIC/EP content.	ugated packaging material is made from 80 % E (Expanded Polyethylene) packaging materia lyethylene low density packaging materials co	ls contains at least 50% recycled

#### HP EliteBook 840 G1 Notebook PC

Ψ₽

Energy Consumption	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
	World Wide -	- May 2014	р

(in accordance with US ENERGY STAR® test method)			
Normal Operation	10.4 W	10.6 W	10.5 W
(Short idle)			
Normal Operation	5.7 W	5.9 W	5.4 W
(Long idle)			
Sleep	0.6 W	0.7 W	0.6 W
Off	0.3 W	0.3 W	0.3 W
	<b>NOTE:</b> Energy efficiency data listed is for an l family. HP computers marked with the Environmental Protection Agency (EP family does not offer ENERGY STAR® of for a typically configured PC featuring Microsoft Windows® operating system	e ENERGY STAR® Logo are comp A) ENERGY STAR® specifications compliant configurations, then e g a hard disk drive, a high efficien	liant with the applicable U.S. for computers. If a model energy efficiency data listed is
Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	36 BTU/hr	36 BTU/hr	36 BTU/hr
(Short idle)			
Normal Operation	19 BTU/hr	20 BTU/hr	18 BTU/hr
(Long idle)			
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr
	* Heat dissipation is calculated based for one hour.	on the measured watts, assumi	ing the service level is attained
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296) Typically Configured - Idle Fixed Disk - Random writes	Sound Power (LWAd, bels) 3.3 4		Sound Pressure (LpAm, decibels) 26 33
Longevity and Upgrading	This product can be upgraded, possibl features and/or components contained		



Options and Accessories (sold separately and availability may vary by country)

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- 2 SODIMM memory slots
- Optional expansion base docking station
- 1 multi-bay II storage port
- Interchangeable HDD

Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the1ppm by weight
- Cadmium greater than 20ppm by weight

	Battery type:	nium ell high capacity Lithium-Ion battery (optional s		
Additional Information	directive	duct is in compliance with the Restrictions of F - 2011/65/EC. product is designed to comply with the Waste		
	(WEEE)	Directive - 2002/96/EC.		
	•	duct is in compliance with California Propositio 9 Water and Toxic Enforcement Act of 1986).	on 65 (State	of California; Safe
	<ul> <li>This pro</li> </ul>	duct is in compliance with the IEEE 1680 (EPEA	AT) standard	d at the Gold level, see
		p <b>eat.net</b> parts weighing over 25 grams used in the proc 3.	duct are ma	rked per ISO11469 and
		duct contains 9.3% post-consumer recycled p duct is 98.1% recycle-able when properly disp	-	
Packaging Materials	External:	PAPER/Corrugated	539.5	5 g
	Internal:	PLASTIC/EPE (Expanded Polyethylene)	49.5	g
		PLASTIC/Polyethylene low density	26	g
	The PLASTIC/EPE content.	igated packaging material is made from 80 % i E (Expanded Polyethylene) packaging material	s contains a	t least 50% recycled

The PLASTIC/Polyethylene low density packaging materials contains at least 50% recycled content.



**Batteries** 

### Options and Accessories (sold separately and availability may vary by country)

#### HP EliteBook 850 G1 Notebook PC

Energy Consumption (in accordance with US ENERGY				
STAR <sup>®</sup> test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz	
Normal Operation	7.6 W	7.9 W	7.6 W	
(Short idle)				
Normal Operation	4.4 W	4.5 W	3.7 W	
(Long idle)				
Sleep	0.7 W	0.7 W	0.7 W	
Off	0.3 W	0.3 W	0.3 W	
	NOTE:	or an ENERCY STAR® compliant o	roduct if offorod within the	

Energy efficiency data listed is for an ENERGY STAR<sup>®</sup> compliant product if offered within the model family. HP computers marked with the ENERGY STAR<sup>®</sup> Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR<sup>®</sup> specifications for computers. If a model family does not offer ENERGY STAR<sup>®</sup> compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows<sup>®</sup> operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	26 BTU/hr	27 BTU/hr	36 BTU/hr
Normal Operation	15 BTU/hr	15 BTU/hr	13 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

Sound Power (LWAd, bels) Sound Pressure (LpAm, decibels)



### Options and Accessories (sold separately and availability may vary by country)

Typically Configured - Idle	3.2	26
Fixed Disk - Random writes	4.0	33
Longevity and Upgrading	This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:	
	<ul> <li>3 USB ports</li> <li>1 PC card slot (type I/II)</li> <li>1 ExpressCard/54 slot</li> <li>1 IEEE 1394 Port</li> <li>2 SODIMM memory slots</li> <li>Optional expansion base docking station</li> <li>1 multi-bay II storage port</li> <li>Interchangeable HDD</li> </ul> Spare parts are available throughout the warranty p production.	eriod and or for up to "5" years after the end of

**Batteries** This battery(s) in this product comply with EU Directive 2006/66/EC Batteries used in the product do not contain: Mercury greater the1ppm by weight • Cadmium greater than 20ppm by weight • Battery size: CR2032 (coin cell) Battery type: Lithium Battery size: 6-cell high capacity Lithium-Ion battery (optional 8 cell available) Battery type: Additional Information This product is in compliance with the Restrictions of Hazardous Substances (RoHS) • directive - 2011/65/EC. This HP product is designed to comply with the Waste Electrical and Electronic • Equipment (WEEE) Directive - 2002/96/EC. This product is in compliance with California Proposition 65 (State of California: Safe • Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see • www.epeat.net Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and • IS01043. This product contains 8.4 % post-consumer recycled plastic (by wt.) ٠ This product is 98.1 % recycle-able when properly disposed of at end of life.



## Options and Accessories (sold separately and availability may vary by country)

Packaging Materials	External:	PAPER/Corrugated	513.5 g	
	Internal:	PLASTIC/EPE (Expanded Polyethylene)	37.1 g	
		PLASTIC/Polyethylene low density	26 g	
	The PLASTIC/E content.	rrugated packaging material is made from 80 % r PE (Expanded Polyethylene) packaging materials olyethylene low density packaging materials cor	contains at least 50% recycled	t.
All models				
Material Usage	to the HP G	t does not contain any of the following substanc eneral Specification for the Environment at: <b>v.hp.com/hpinfo/globalcitizenship/environme</b>		fer
	<ul> <li>Ce</li> <li>Ce</li> <li>Ca</li> <li>Ch</li> <li>Ch</li> <li>Ch</li> <li>Ch</li> <li>Ea</li> <li>Le</li> <li>Me</li> <li>Le</li> <li>Me</li> <li>Nic</li> <li>ha</li> <li>Oz</li> <li>Po</li> <li>Po</li> <li>Po</li> <li>Po</li> <li>Po</li> <li>Po</li> <li>Po</li> <li>be</li> <li>Ra</li> </ul>	bestos rtain Azo Colorants rtain Brominated Flame Retardants - may not be dmium lorinated Hydrocarbons lorinated Paraffins rmaldehyde logenated Diphenyl Methanes ad carbonates and sulfates ad and Lead compounds ercuric Oxide Batteries ckel - finishes must not be used on the external s ndled or carried by the user. one Depleting Substances lybrominated Biphenyls (PBBs) lybrominated Biphenyl Ethers (PBBEs) lybrominated Biphenyl (PCB) lychlorinated Terphenyls (PCT) lyvinyl Chloride (PVC) - except for wires and cabl en voluntarily removed from most applications. dioactive Substances butyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin (	urface designed to be frequently es, and certain retail packaging has	
Packaging Usage	HP follows	these guidelines to decrease the environmental	mpact of product packaging:	
	a Eli	minate the use of heavy metals such as load, shr	amium marcuru and cadmium in	

• Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.



### HP EliteBook 820 G1 Notebook PC HP EliteBook 840 G1 Notebook PC HP EliteBook 850 G1 Notebook PC

### Options and Accessories (sold separately and availability may vary by country)

- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and<br/>RecyclingHewlett-Packard offers end-of-life HP product return and recycling programs in many geographic<br/>areas. To recycle your product, please go to: <a href="http://www.hp.com/go/reuse-recycle">http://www.hp.com/go/reuse-recycle</a> or contact<br/>your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in<br/>a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <u>http://www.hp.com/go/recyclers</u>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate For more information about HP's commitment to the environment:

#### Environmental Information

Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC\_GBU\_ Product\_Design\_ISO\_14K\_Certificate.pdf and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf

#### **Country of Origin**

China

Туре	Description		Part #
Cases	HP Essential Top Load Case (up to 15.6") HP Business Top Load Case HP Business Slim Top Load Case HP Professional Series Carrying Case (up to 15.6")	H2W17AA#xxx H5M92AA H5M91AA	H4J90AA



	HP Professional Slim Top Load Case (up to 17.3") HP Professional Leather Case (up to 17.3")	H4J91AA H4J94AA
	HP Professional Leather Case (up to 17.3 )	П4Ј94АА
Docking	HP 2013 UltraSlim Docking Station	D9Y32AA#xxx
-	HP Display and Notebook Stand	AW662AA#xxx
	HP USB 2.0 Port Replicator	H1L07AA#xxx
	HP USB 3.0 Port Replicator	H1L08AA#xxx
Input/Output – Mice	HP Comfort Grip Wireless Mouse	H2L63AA
	HP 3-button USB Laser Mouse	H4B81AA
	HP X4000b Bluetooth Mouse	H3T50AA#xxx
	HP Ultra Mobile Wireless Mouse	H6F25AA
Input/Output – Keyboards	HP Stylish Wireless KB/Mouse	H4B79AA
Memory	HP 2GB DDR3L-1600 1.35V SODIMM	H6Y73AA#xxx
	HP 4GB DDR3L-1600 1.35V SODIMM	H6Y75AA#xxx
	HP 8GB DDR3L-1600 1.35V SODIMM	H6Y77AA#xxx
Adapters	90W Slim Combo Adapter	H4A41AA#xxx
-	HP Smart 65W Travel AC Adapter	AU155AA#xxx
	90W Smart AC Adapter	ED495AA#xxx
	HP 65W Slim Adapter	H6Y82AA
	HP 90W Slim Combo Adapter w/ USB	H6Y84AA
Batteries	HP CO06XL Notebook Battery (EliteBook 840 only)	E7U23AA
	HP CM03XL Notebook Battery (EliteBook 840 and 850 only)	E7U24AA
	HP SB03XL Notebook Battery (EliteBook 820 only)	E7U25AA
Security	HP ExpressCard Smart Card Reader	AJ451AA
	HP Docking Station Cable Lock	AU656AA#xxx
	HP UltraSlim Keyed Cable Lock	H4D73AA
Storage - External Storage	HP External USB Optical Drive	F2B56AA
Storage - SSD	HP 180GB* Solid State Drive	H4T75AA
	HP 256GB* SED Solid State Drive	H2C38AA
	* For hard drives and solid state drives, GB = 1 billion bytes. Actual for	
	Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk	is reserved for the
	system recovery software.	
Health and Education	20 Notebook Managed Charging Cart	QL489AA#xxx
	20 Notebook Charging Cart	QL488AA
	30 Notebook Managed Charging Cart	QL490AA
	30 Notebook Charging Cart	H4F31AA#ABA
	HP Presentation Station 1000	QL815AA
Monitors	HP EliteDisplay E231 23-inch LED Monitor	C9V75AA/A8/AS/AT
	World Wide – May 2014	Page 63

### Options and Accessories (sold separately and availability may vary by country)

HP LA1956x 19-inch LED Monitor HP LA2405x 24-inch LED Monitor HP ProDisplay P221 21.5" LED Monitor HP ProDisplay P201 20" LED Monitor A9S75AA/A8/AS/AT A9P21AA/A8/AT C9E49AA/A8/AS/AT C9F26AA/A8/AS/AT

Copyright © 2014 Hewlett-Packard Development Company, L.P.

All rights reserved. Intel, Core, and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Adobe is a trademark of Adobe Systems Incorporated. ENERGY STAR is a registered mark owned by the U.S. government.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.



### Options and Accessories (sold separately and availability may vary by country)

#### Summary of Changes

Date of change:	Version History:		Description of change:
May 15, 2014	From April'14 version to May	Changed	Energy consumption, heat dissipation, batteries, packaging materials
	'14 version		
May 27, 2014	May 14 to May 27	Changes	Removed notes about SSD availability and added China as Country of orgign

