


Specifications

Model		NP-ME361XG	NP-ME331XG	NP-ME301XG	NP-ME401WG	NP-ME361WG	NP-ME331WG	NP-ME301WG
Image	Projection Technology	3LCD Technology						
	Native Resolution*1	1,024 x 768 (XGA)			1,280 x 800 (WXGA)			
	Aspect Ratio	4:3			16:10			
	Contrast Ratio	12,000:1 with IRIS			6,000:1 with IRIS			
	Brightness*2*3	3,600 High Bright / 2,700 Normal / 2,160 Eco ANSI Lumens (Approx.)	3,300 High Bright / 2,475 Normal / 1,980 Eco ANSI Lumens (Approx.)	3,000 High Bright / 2,400 Normal / 2,400 Eco ANSI Lumens (Approx.)	4,000 High Bright / 3,000 Normal / 2,400 Eco ANSI Lumens (Approx.)	3,600 High Bright / 2,700 Normal / 2,160 Eco ANSI Lumens (Approx.)	3,300 High Bright / 2,475 Normal / 1,980 Eco ANSI Lumens (Approx.)	3,000 High Bright / 2,400 Normal / 1,800 Eco ANSI Lumens (Approx.)
	Lamp	235 W AC (140 W AC Eco Mode)		214 W AC (140 W AC Eco Mode)	240 W AC (140 W AC Eco Mode)	235 W AC (140 W AC Eco Mode)		214 W AC (140 W AC Eco Mode)
	Lamp Life*4	9,000 hrs Eco / 5,000 hrs Normal / 4,000 hrs High Bright Mode						
	Lens	F=1.7 - 2.1, f=17.5 - 29 mm						
	Keystone correction	+/- 30° manual horizontal / +/- 30° manual vertical						
	Projection Angle	10.7 to 11.4 deg (Wide)			6.5 to 6.8 deg (Tele)			
	Projection Factor	1.3 - 2.2 : 1 (Throw ratio: 1.3, Zoom ratio: 2.2)						
	Projection Distance	0.6 m - 13.8 m			0.7 m - 14.6 m			
	Screen Size (diagonal)	Maximum: 762 cm / 300 inch; Minimum: 76 cm / 30 inch						
	Zoom	Manual						
	Focus Adjustment	Manual						
Supported Resolutions*5	1,920 x 1,200 (WUXGA); 1,920 x 1,080 (HDTV 1,080p/i); 1,680 x 1,050 (WSXGA+); 1,600 x 1,200 (UXGA); 1,600 x 9,00 (WXGA++); 1,440 x 900 (WXGA+); 1,400 x 1,050 (SXGA+); 1,280 x 1,024 (MAC 23"); 1,280 x 1,024 (SXGA); 1,280 x 800 (WXGA); 1,280 x 768 (XGA); 1,024 x 768 (MAC 19"); 832 x 624 (MAC 16"); 800 x 600 (SVGA); 720 x 576 (SDTV 480p/i); 720 x 480 (WXGA); 1,280 x 720 (HDTV 720p); 1,152 x 870 (MAC 21"); 1,024 x 768(480p); 720 x 480 (SDTV 480i); 640 x 480 (VGA); 640 x 480 (MAC 13")							
Frequency	Horizontal: 15 - 100 kHz (RGB: 24 kHz - 100 kHz); Vertical: 50 - 120 Hz							
Connectivity	RGB (analogue)	Input: 1 x Mini D-sub 15-pin, compatible component (YCbCr) / Output: 1 x Mini D-sub 15-pin						
	HDMI	Input: 2 x HDMI						
	Video	Input: 1 x RCA						
	Audio	Input: 1 x Stereo Mini Jack / Output: 1 x Stereo Mini Jack						
	Control	Input: 1 x D-sub 9-pin (RS-232C)						
	LAN	1 x RJ45; Optional WLAN						
	USB	1 x Type A (USB 2.0 high speed); 1 x Type B						
Video Signals	NTSC / NTSC4.43 / PAL / PAL-N / PAL-M / PAL-60 / SECAM							
Remote Control	Aspect Ratio; Audio Control; Auto Adjust; AV Mute; Digital Zoom; Freeze; Help Eco Mode; ID set; Optional Presentation and Mouse Control; Picture Adjust; Picture Mode; Source Select							
Electrical	Power Supply	100 - 240 V AC; 50 - 60 Hz						
	Power Consumption	241 W (Normal) / 201 W (Eco) / 2.3 W (Network Stand-by) / 0.45 W (Stand-by); 309 W (High Bright)	241 W (Normal) / 201 W (Eco) / 2.3 W (Network Stand-by) / 0.45 W (Stand-by); 316 W (High Bright)	241 W (Normal) / 201 W (Eco) / 2.3 W (Network Stand-by) / 0.45 W (Stand-by); 316 W (High Bright)	241 W (Normal) / 201 W (Eco) / 2.3 W (Network Stand-by) / 0.45 W (Stand-by); 309 W (High Bright)	241 W (Normal) / 201 W (Eco) / 2.3 W (Network Stand-by) / 0.45 W (Stand-by); 286 W (High Bright)	241 W (Normal) / 201 W (Eco) / 2.3 W (Network Stand-by) / 0.45 W (Stand-by); 286 W (High Bright)	241 W (Normal) / 201 W (Eco) / 2.3 W (Network Stand-by) / 0.45 W (Stand-by); 286 W (High Bright)
Mechanical	Dimensions (W x H x D)	339 mm x 102 mm x 259 mm (not include protrusions)						
	Weight	2.9 kg						
	Quietness	29 dB / 36 dB (Eco / Normal)	29 dB / 35 dB (Eco / Normal)	29 dB / 37 dB (Eco / Normal)	29 dB / 36 dB (Eco / Normal)	29 dB / 35 dB (Eco / Normal)	29 dB / 35 dB (Eco / Normal)	29 dB / 35 dB (Eco / Normal)
Environmental Conditions	Operating Temperature	5 °C to 40 °C						
	Operating Humidity	20 % to 80 %						
	Storage Temperature	-10 °C to 50 °C						
	Storage Humidity	20 % to 80 %						
Speaker	Speaker	1 x 20 W (mono)						
Additional Features	Special Characteristics	Auto Eco Mode; Auto Power ON/OFF; Carbon Savings Meter; Colour Management; Content Transmission via Network; Crestron RoomView; DICOM Simulation; Direct Power-Off Function; High Altitude Mode; Kensington security slot; Keypad Lock; Keystone Correction (H=±30°, V=±30°); Lens Cap; Magnify; NavSet Administrator 2; Off-Timer; Optional User Logo; Optional WLAN; OSD with 30 languages; Password Security System; Quick On/Off; RS-232Control; Security Bar; USB Display; USB Viewer for JPEG; Virtual Remote for direct PC control; Wall Colour Correction						
Shipping Content	IR Remote Control (RD-469E); Mini D-SUB Signal Cable (1.8 m); Quick Setup Guide; Security Sticker; Users Manual on CD-ROM; Utility software							
Optional Accessories	DisplayNote; Lamp (NP43LP/NP16LP); MultiPresenter Stick; Wireless LAN module NP05LM4							

\*1: Effective pixels are more than 99.99%. \*2: This is the light output value (ANSI lumens) when the [PRESET] mode is set to [HIGH-BRIGHT]. If any other mode is selected as the [PRESET] mode, the light output value may drop slightly. \*3: Compliance with ISO21118-2012. \*4: The average time span for the brightness of the lamp to be reduced by half; does not refer to the warranty period for the lamp. \*5: An image with higher or lower resolution than the projector's native resolution will be displayed with Advanced AccuBlend.


Throw distance and screen size

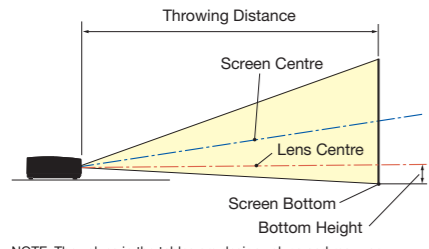


ME361XG / ME331XG / ME301XG				ME401WG / ME361WXG / ME331WG / ME301WG			
Screen Size (inch)	Throwing Distance (m)		Bottom Height (cm)	Screen Size (inch)	Throwing Distance (m)		Bottom Height (cm)
	Wide	Tele			Wide	Tele	
30 (0.61 x 0.46)	0.79	1.34	7.1	25 (0.54 x 0.34)	0.69	1.17	2.9
40 (0.81 x 0.61)	1.07	1.80	9.5	30 (0.85 x 0.40)	0.83	1.42	3.5
60 (1.22 x 0.91)	1.62	2.72	14.3	40 (0.86 x 0.54)	1.13	1.90	4.7
80 (1.63 x 1.22)	2.18	3.64	19.1	60 (1.29 x 0.81)	1.71	2.88	7.1
100 (2.03 x 1.52)	2.73	4.56	23.8	80 (1.72 x 1.08)	2.30	3.85	9.4
120 (2.44 x 1.83)	3.29	5.49	28.6	100 (2.15 x 1.35)	2.88	4.82	11.8
150 (3.05 x 2.29)	4.12	6.87	36.7	120 (2.59 x 1.62)	3.47	5.80	14.1
180 (3.66 x 2.74)	4.96	8.25	42.9	150 (3.23 x 2.02)	4.35	7.26	17.7
200 (4.06 x 3.05)	5.51	9.17	47.6	180 (3.88 x 2.42)	5.23	8.72	21.2
240 (4.88 x 3.66)	6.62	11.02	57.2	200 (4.31 x 2.69)	5.81	9.96	23.6
300 (6.10 x 4.57)	8.29	13.78	71.4	240 (5.17 x 3.23)	6.99	11.64	28.3
				300 (6.46 x 4.04)	8.74	14.56	35.3

NOTE: The values in the tables are design values and may vary.


Cabinet dimensions

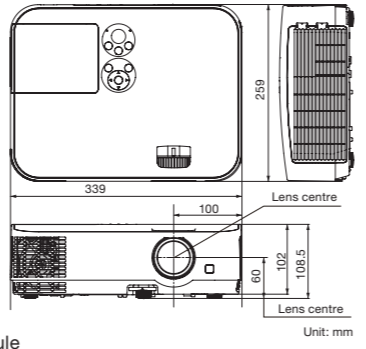

Remote control



Options



Replacement lamp NP43LP  
\* NP16LP is also usable.



Wireless LAN module NP05LM4

- Do not stare into the lens during use.
- The projector can be unplugged immediately after it is turned off. Parts of the projector become heated during operation. Use caution when picking up the projector immediately after it has been operating.

A greater projector - ease of use, ease of setting and ease of connection

Multipurpose Projector

ME361XG / ME331XG / ME301XG / ME401WG  
ME361WG / ME331WG / ME301WG



MultiPresenter, NavSet, Virtual Remote and CARBON METER are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan and other countries.  
Mac is a trademark of Apple Inc. in the United States and other countries  
iOS is a trademark or registered trademark of Cisco in the United States and other countries and is used under license.  
Android is a trademark or registered trademark of Google Inc.  
The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.  
CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and other countries.  
Windows is a registered trademark or trademark of Microsoft Corporation in the United States and / or other countries.  
Trademark P.U. Link is a trademark applied for trademark right in Japan, the United States of America and other countries and areas.  
Android is a trademark of Google Inc.  
All other trademarks are the property of their respective owners.  
The images in this brochure are samples. All rights reserved. All specifications are subject to change without notice. 2 May 2017

A convenient LCD projector easily configured by convenient utility software.

Also includes several eco features, such as longer lamp life, low fan noise, energy saving technology, and a carbon meter.

## Settings for Greater Ease-of-Use

### Easy Connection

Easily connect your projector to PCs, tablets, smart phones or other smart devices equipped with MultiPresenter application software by inputting a PIN code.

### Easy Configuration of Other Smart Devices by Convenient Utility Software (NaViSet Administrator 2, Virtual Remote Tool, etc.)

Virtual Remote lets you use your computer to switch the power of the projector on and off and change the input signal.



Administrator 2

### Various Keystone Corrections

Auto Vertical Keystone Correction  
HV Keystone (+/- 30° manual horizontal / +/- 30° manual vertical) / Corner Stone / Pincushion Correction

### 1.7x Zoom


The projector has a 1.7x zoom to cover a wide projection distance, so you can setup in various locations.

### Interfaces for Various Functions

The projector is equipped with 2 HDMI inputs for projecting digital images in high quality, as well as a wired/wireless (option\*) LAN port.

You can project computer images via USB cable instead of VGA cable. In this case, you can control your PC mouse via the projector's remote control.

The projector also has a viewer function that lets you project data (JPEG) stored on USB memory, so you can give presentations without a computer.

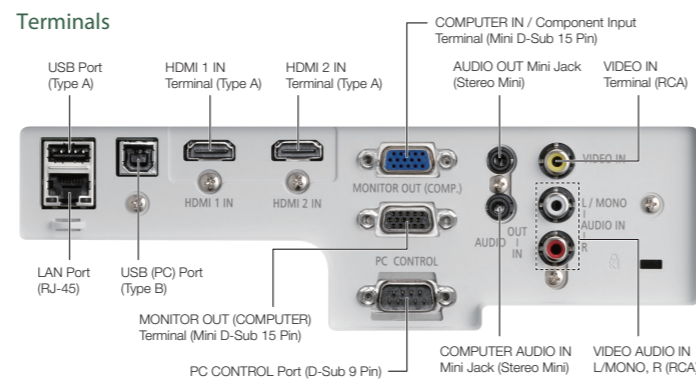

## Enhanced Functions for Reduced Power Consumption and TCO

### A Complete Lineup of Eco Functions

The projector has an Auto Eco Mode, which automatically adjusts the brightness to suit the projected image, and an Eco Mode, which is convenient when it is too bright for small screen projection. There are Eco buttons on the projector and a remote control so you can more easily enable Eco Mode.

### Improved Lamp Lifetime

The time between lamp exchanges has been improved. For Eco Mode Off and Eco Mode, the times are 4,000 and 9,000 hours, respectively.

\* The low power design cuts energy consumption in standby to 0.23 W (100 - 130 V AC) / 0.45 W (200 - 240 V AC), which helps with TCO reduction.

### Carbon Meter

This lets you check the amount of CO<sub>2</sub> you reduced by using Eco Mode.

## Advanced Functions

### MultiPresenter

MultiPresenter is application software that lets you display your device's screen (PC, tablet, smart phone, etc.) on the receiver projectors via wired or wireless LAN. MultiPresenter is free and available on Windows, Mac, iOS, and Android. MultiPresenter can send images from your various devices, which enables you to display real-time images with the internal camera or web pages on the smart devices in combination with a file sharing application.



### Desktop Version (Win/Mac)

Computer audio and video data (audio can be transmitted only when using Windows) can be transmitted via a wireless or wired LAN.


- Easy Connection  
Input a 4-digit number (PIN code) for a network connection via wireless LAN.
- Multiple devices (maximum of 16 screens) can display at the same time and simultaneously display onto multiple receiving projectors.
- Projector control

### Mobile Version (Android/iOS)


You can transmit files, photos, camera images, files of web pages, and other information stored on Android or iOS devices via a wireless LAN.

- Easy Connection  
Input a 4-digit number (PIN code) for a network connection via wireless LAN.
- Multiple devices (maximum of 16 screens) can display at the same time and simultaneously display onto multiple receiving projectors.
- Projector control

### Connection Example

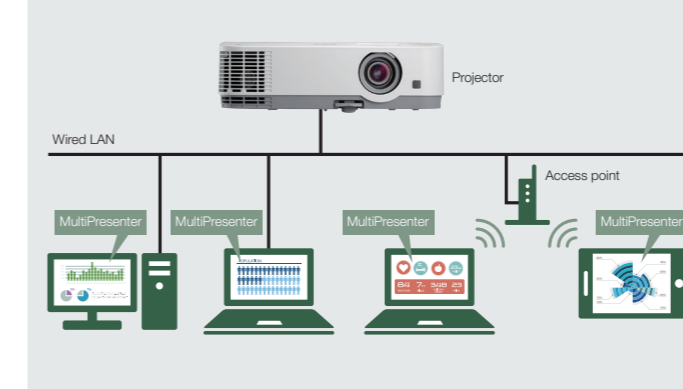

### Wireless connection image using wireless LAN module

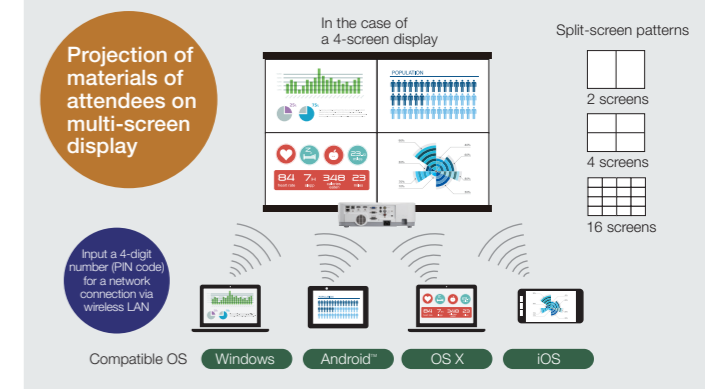

## Other Functions

- Built-in speaker with a powerful 20W output
- High contrast ratio of 12,000:1 (XGA) / 6,000:1 (WXGA)
- Designed for a quiet noise level of 29 dB (in Eco Mode) to prevent annoying operation noises during projection.
- Quick Power Off and Direct Power Off allow speedy clean-up and transfer after use
- Auto Power On automatically switches on the power when the power cord is connected or a signal is input via Comp.1
- Wall Colour Correction for vivid images even without a screen.
- Includes a remote with a control ID registration function, which allows operation of multiple projectors with a single remote.

- Simple "DICOM SIM" mode allows for the easy of medical images.  
\* Cannot be used for diagnoses of display images.

- Control capability
  - Crestron RoomView® with emergency function
  - HTTP server
  - PJLink



ME361XG

3,600 ANSI lumens XGA 2.9kg

ME331XG

3,300 ANSI lumens XGA 2.9kg

ME301XG

3,000 ANSI lumens XGA 2.9kg

ME401WG

4,000 ANSI lumens WXGA 2.9kg

ME361WG

3,600 ANSI lumens WXGA 2.9kg

ME331WG

3,300 ANSI lumens WXGA 2.9kg

ME301WG

3,000 ANSI lumens WXGA 2.9kg