# HUDDLEPOD A

The HuddlePod Air2 is the ideal wireless

speakerphone with an easy & reliable wireless

connection.

Model Number: HC-HPAIR2-DUO

### **Compatibility**

- Windows 7/8/8.1/10
- Mac OS X
- Acano
- Adobe Connect
- **Blue Jeans**
- Cisco Jabber
- Cisco WebEx
- **Easymeeting**
- **Facetime**
- **Fuzebox**
- **Google Hangout**
- GoToMeeting
- Lifesize
- Skype for Business (Lync)
- Polycom RealPresence
- Radavision
- **Spontania**
- Skype
- TurboMeeting.US
- Vidyo
- Zoom.US
- Google Hangouts on Air
- YouTube Live

#### What's in the Box

- (2) HuddlePod Air2 chat pods
- (1) Wireless receiver & antenna
- (2) Travel case (Neoprene)
- (1) User Manual
- (2) USB 2.0 cables (charge & power only)
- (2) USB chargers
- 1. Power LEDs

Blue LEDs illuminate when power is present


2. USB 2.0 Port

Mini USB port for power & charging

3. Audio Output 3.5mm headphone jack

#### **Features**

- 2.4 GHz wireless
- **Echo cancellation**
- Noise cancellation
- 360° omni-pickup
- Full duplex audio

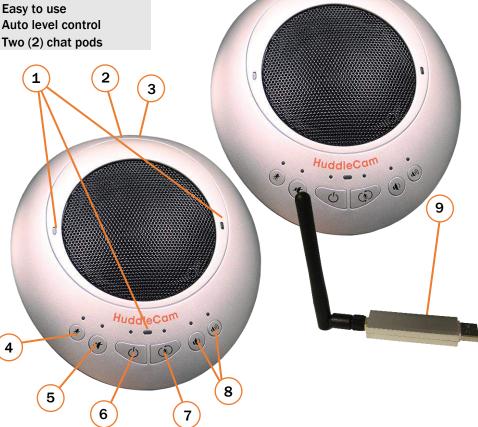

- **Microphone Mute** Toggle microphone on/off
- **Speakerphone Mute** Toggle chat pod on/off
- 6. Power Button Power chat pod on/off
- Microphone Swap Swap between the 3 microphones
- Volume Up/Down Control speaker volume
- **Wireless Receiver Durable wireless receiver**

## **Specifications**

Microphone Features		
<b>Echo Cancellation</b>	256 Channel Echo Cancellation	
Audio Output	1/8" TRS Headphone	
Noise Cancellation	Intelligent NC up to 16db	
Digital EQ	Built-in Digital EQ for stable audio	
Battery Life	8-9 Hours, 4-5 hour charge time	
Microphone Range	9.8 feet (3m)	
Warranty	3 Years	

Wireless Speakerphone Specifications (per unit)			
Weight:	1.0 lbs (0.45 kg)		
Dimensions (in.)	7" L x 6" W x 1.5" H		
Dimensions (mm.)	178mm L x 152mm W x 38mm H		
<b>Working Environment:</b>	Temp 0~40°C, Humidity 20% ~ 85%		
Compatibility:	MS Win 7/8/8.1/10, Mac 10.5+, Android 4.4+		
RF Frequency Range:	2.400 GHz ~ 2.4835 GHz		
Certifications:	CE Mark (R & TTE Directive)		



Camer	a Line			
0	HC-GO-BK		HC-GO-WH	USB-powered, 110° HFOV, all-in-one Camera, Mic, & Speakerphone
	HC3X-BK-G2	2	HC3X-WH-G2	3X optical zoom, 74° HFOV, USB 2.0 video up to 1080p-30
	HC3XA-BK		HC3XA-WH	3X opt zoom w/ built in mic array, 74° HFOV USB 2.0 video up to 1080p-30 $$
8	HC3XW-GY-G2	9	HC3XW-WH-G2	3X Wide optical zoom, 90° HFOV, USB 3.0 video up to 1080p-30
	HC10X-720-BK		HC10X-720-WH	10X optical zoom, 57° HFOV, USB 2.0 video up to 1080p-30
	HC10XA-BK	•	HC10XA-WH	10X opt zoom w/ built in mic array, 57° HFOV USB 2.0 video up to 1080p-30
9	HC10X-GY-G3	9	HC10X-WH-G3	10X optical zoom, 61° HFOV, USB 3.0 video up to 1080p-30
9	HC20X-GY-G2	9	HC20X-WH-G2	20X optical zoom, 58° HFOV, USB 3.0 video up to 1080p-30
8	HC30X-GY-G2	9	HC30X-WH-G2	30X optical zoom, 63° HFOV, USB 3.0 video up to 1080p-30
(N. 1)	HC-SIMPLTRACK-TP		HC-SIMPLTRACK-CM	20X optical zoom, 59° HFOV, Auto tracking camera w/ video up to 1080p-60
Control	Accessories			
###	HC-JOY-G2			RS232, RS485, & RS422 3D joystick, VISCA, Pelco-P, Pelco-D
ે (::::) ં	DB9M-F-xx		VISCA-xx	VISCA RS232 Plenum cable, 4 lengths shown in ft. (xx=25, 50, 75, 100)
Mountii	ng Accessories			
13	HCM-1-BK	E	HCM-1-WH	Small Wall Mount, mounts directly to wall or box with supplied hardware
4	HCM-2-BK		HCM-2-WH	Large Wall Mount, mounts directly to wall or box with supplied hardware
6	HCM-1C-WH	8	HCM-2C-WH	Small/Large open ceiling mount, mounts to 1" NPT pipe
	PT-CM-1-BK		PT-CM-1-WH	Surface Ceiling Mount, mounts directly to ceiling or box w/ supplied hardware
Confere	ence Audio			
	HP-AIR-BK		HP-AIR-WH	Wireless Speakerphone with USB receiver
	HP-AIR-BA-BK			Wireless Speakerphone with USB receiver and external amplifier feed
	HP-AIR2-DUO			Dual Wireless Speakerphones with USB receiver

>