



**Model Name** **MX661 Digital Projector**

**Unique selling point**

- \* Designed for Corporate
- \* Easy Installation & Control
- \* Easy Maintenance
- \* Wireless display by Qpresenter2.0 APP

**Trade Mark**




<b>Projection System</b>	DLP	
<b>Native Resolution</b>	XGA(1024x768)	
<b>Brightness</b>	3000AL	
<b>Contrast Ratio</b>	13000:1	
<b>Display Color</b>	1.07 Billion Colors	
<b>Lens</b>	F=2.51-2.69, f=21.95-24.18mm	
<b>Aspect Ratio</b>	Native 4:3 (5 aspect ratio selectable)	
<b>Throw Ratio</b>	1.97-2.17 (50"@2m)	
<b>Image Size (Diagonal)</b>	37"-300"	
<b>Zoom Ratio</b>	1.1:1	
<b>Lamp Type</b>	210W	
<b>Lamp(Normal/Economic/SmartEco Mode) *</b>	3500/5000/6500 hours	
<b>Keystone Adjustment</b>	1D, Vertical +/- 40 degrees	
<b>Projection Offset</b>	130% ±5%	
<b>Resolution Support</b>	VGA(640 x 480) to UXGA(1600 x 1200)	
<b>Horizontal Frequency</b>	27K~102KHz	
<b>Vertical Scan Rate</b>	23~120Hz	
<b>Compatibility</b>	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
<b>Interface</b>	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	HDMI	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Microphone in (Mini Jack)	x 1
	Speaker	2W x 1
	LAN (RJ45)	x 1 (LAN Control & LAN Display)
	USB (Type A)	x 1 (USB Reader & Wireless Display)
	USB (Type B)	x 1 (Download & Page up/down)
	USB (Type mini B)	x 1 (USB Display & Download)
	RS232 (DB-9pin)	x 1
	IR Receiver	x 1 (Front)
<b>Dimensions</b>	Dimensions(W x H x D)	327 x 126 x 231mm
	Weight	2.6kg
<b>Power</b>	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	285W(typical), Standby<0.5W
<b>Audible Noise</b>	34/30 dBA (Normal/Economic mode)	
<b>On-Screen Display Languages</b>	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
<b>Picture Modes</b>	Dynamic/Presentation/sRGB/Cinema/User 1/User 2	
<b>Accessories</b>	<b>Standard</b>	<b>Optional</b>
	Remote Control w/ Battery	Presentation Plus P/N: 65J9306.002
	Power Cord (by region)	Spare Lamp Kit P/N: 5Jj8F05.001
	User Manual CD	Ceiling Mount P/N: 5Jj2K01.001
	Quick Start Guide	3D Glasses P/N: 5Jj0T14.011
	Warranty Card (by region)	
	VGA(D-sub 15pin) Cable	

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


# MX661 Digital Projector

## Distance Chart

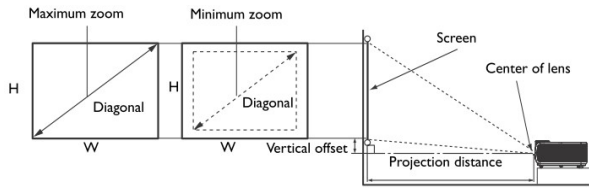


Screen size				Projection distance (mm)			Vertical offset (mm)
Diagonal		W (mm)	H (mm)	Min distance (max. zoom)	Average	Max distance (min. zoom)	
Inch	mm						
30	762	610	457	1200	1260	1320	69
40	1016	813	610	1600	1680	1760	91
50	1270	1016	762	2000	2100	2200	114
60	1524	1219	914	2400	2520	2640	137
80	2032	1626	1219	3200	3360	3520	183
100	2540	2032	1524	4000	4200	4400	229
120	3048	2438	1829	4800	5040	5280	274
150	3810	3048	2286	6000	6300	6600	343
200	5080	4064	3048	8000	8400	8800	457
220	5588	4470	3353	8800	9240	9680	503
250	6350	5080	3810	10000	10500	11000	572
300	7620	6096	4572	12000	12600	13200	686

## Wall mount/Ceiling mount Chart

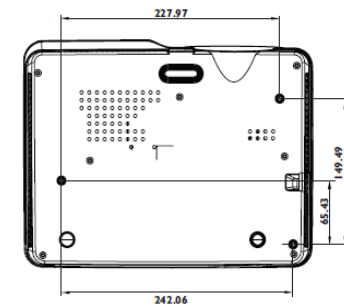

Ceiling mount screws:  
M4 x 8 (Max. L = 8 mm)

Unit: mm

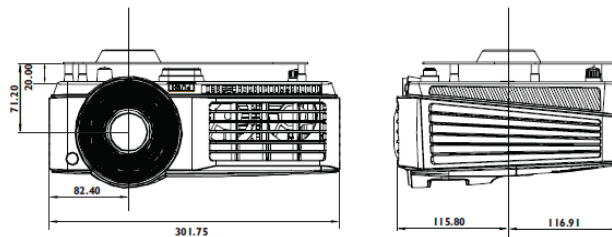

## Dimension

